

The Feet in HCI: A Survey of Foot-Based Interaction

EDUARDO VELLOSO, Lancaster University
DOMINIK SCHMIDT, Hasso Plattner Institute
JASON ALEXANDER, Lancaster University
HANS GELLERSEN, Lancaster University
ANDREAS BULLING, Max Planck Institute for Informatics

Foot-operated computer interfaces have been studied since the inception of Human-Computer Interaction. Thanks to the miniaturisation and decreasing cost of sensing technology, there is an increasing interest exploring this alternative input modality, but no comprehensive overview of its research landscape. In this survey, we review the literature on interfaces operated by the lower limbs. We investigate the characteristics of users and how they affect the design of such interfaces. Next, we describe and analyse foot-based research prototypes and commercial systems in how they capture input and provide feedback. We then analyse the interactions between users and systems from the perspective of the actions performed in these interactions. Finally, we discuss our findings and use them to identify open questions and directions for future research.

CCS Concepts: • **Human-centered computing** → **Pointing devices; Pointing; Gestural input; Accessibility technologies;**

General Terms: Human Factors

Additional Key Words and Phrases: foot interaction, feet tracking, gestural interfaces

ACM Reference Format:

Eduardo Velloso, Dominik Schmidt, Jason Alexander, Hans Gellersen, and Andreas Bulling, 2015. The Feet in HCI: A Survey of Foot-Based Interaction *ACM Comput. Surv.* 9, 4, Article 39 (July 2015), 36 pages.
DOI: <http://dx.doi.org/10.1145/0000000.0000000>

1. INTRODUCTION

In December, 1968, Douglas Engelbart delivered what later became known as *The Mother of All Demos*. In this famous 90-minute presentation, Engelbart introduced the world to the mouse, amongst other prototypes of the fundamental elements of graphical user interfaces (GUI). Whereas it is widely known that Engelbart and his team created the mouse, it is often forgotten that before reaching this design, they explored different prototypes operated by the feet [English et al. 1967; Engelbart 1984]. Since then, research in HCI and other fields has given rise to a large variety of computer interfaces operated by the feet, right through to work that employs the feet in mobile and wearable contexts, on interactive floors, and in smart environments. However, in spite of the volume of research conducted on the topic, there is no single reference that comprehensively overviews the literature, despite a few early works attempting to provide a framework for classifying foot interfaces [Pearson and Weiser 1986],[Rovers and

Authors' addresses: E. Velloso, H. Gellersen and J. Alexander, School of Computing and Communications, Infolab21, Lancaster University, Lancaster, UK. Andreas Bulling, Max Planck Institute for Informatics, Perceptual User Interfaces Group, Campus E1 4, 66123 Saarbrücken, Germany. Dominik Schmidt, The Human Computer Interaction Lab, Hasso Plattner Institute, Prof-Dr-Helmert Str. 2-3, 14482 Potsdam, Germany.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2015 ACM. 0360-0300/2015/07-ART39 \$15.00

DOI: <http://dx.doi.org/10.1145/0000000.0000000>

Van Essen 2006]. This work aims at filling this gap, with a comprehensive review of foot-based interaction.

Work in foot-based interaction emerged from different motivations: the feet provide an alternative to the hands for accessible input [Springer and Siebes 1996; Carrozza et al. 2007]; they can reach areas that are awkward to reach with the hands such as floors [Augsten et al. 2010] and the bottom part of walls [Jota et al. 2014]; they provide a natural mapping to locomotion tasks [Drossis et al. 2013; Hollerbach 2002]; they provide additional input channels for assisting other modalities in complex tasks [Göbel et al. 2013; Simeone et al. 2014]; etc.

These different motivations have resulted in the development of a large variety of foot-enabled devices and research contributions from different communities. For example, the different foot mice and joysticks explored in accessibility research; the variety of sensor-enabled trainers and insoles created by the wearable computing community; and the diverse ways of tracking the feet unobtrusively with colour and depth cameras that resulted from computer vision research.

This paper reviews devices and interactions that involve our lower limbs. Considering that when we move our legs we invariably also move our feet, for the sake of simplicity, we refer to these as foot-based interactions. To display the breadth of research that has been conducted, the scope of this survey is broad, covering works that describe foot-operated, foot-worn, and foot-tracking devices; and studies that evaluate interactions afforded by the feet. Also, to put such interactions in context and to give a theoretical background to the understanding of users' capabilities, we review the literature on the anatomy, biomechanics and psychology of the behaviour of the lower limbs.

Regardless of the input or output modalities involved, HCI involves *users*, *systems* and the *interactions* between them. Understanding users helps the design of ergonomically optimal, more widely accessible and culturally appropriate interfaces. Understanding systems provides both an awareness of tools available to capture input and provide output, as well as an appreciation of existing systems that provides inspiration and direction for future work. Understanding interactions provides a common vocabulary for the design of interactive systems as well as an awareness of user performance limitations.

This work contributes an analysis of foot-based interactions based on these three lenses. From the *user* perspective (Section 3), we analyse the lower limbs' anatomy and movement, as well as the implications for design created by the pose in which users interact with such systems. We also discuss accessibility and cultural issues.

From the *system* perspective (Section 4), we first analyse the different ways of capturing input from the feet—mediated sensing, intrinsic sensing and extrinsic sensing—and how these systems differ in their properties. We also discuss their output and how they provide feedback to users.

Finally, from the *interaction* perspective (Section 5), we analyse four categories of actions that users employ when interacting using their feet: deictic, manipulative, semaphoric and implicit actions. These three perspectives overlap substantially, as one perspective depends on the other to create interactive experiences, but they provide a structure for discussing the most important elements for designing interactions that use the feet as an input modality.

For practitioners, this paper provides a theoretical foundation for creating foot interfaces and interactions. For researchers, the paper provides an overview of the research landscape in foot interaction and points out open research questions.

2. RELATED WORK

We are not the first to attempt to classify work on foot interaction. When Pearson and Weiser began the development of their *moles*, they provided a historical classification of the feet in the interaction with mechanical devices. In the pre-industrial era, their function was to transmit both power and control (e.g. the horseman's stirrup, the farmer hay fork and shovel, the pipe's organist's bellows and foot keys, the potter's kick wheel). With the advent of electricity and other means of providing power, their function shifted to control alone (e.g. car pedals, arcade games, gas pressure controls, guitar effects pedals). Finally, they were used for foot-mediated input for computers (e.g. flight controls for aircrafts and simulators and volume and sustain controls in music synthesisers) [Pearson and Weiser 1986]. Whereas this classification puts the role of the feet as an interaction modality in context, it does not provide a structure for modern devices.

Rovers and van Essen's classify foot interactions according to their complexity: (1) simple toggle actions (e.g. foot switches), (2) single parameter (e.g. pedals), (3) multiple parameters (e.g. moles) and (4) intelligent footwear (e.g. Adidas "1") [Rovers and Van Essen 2006]. This classification is also not ideal for modern devices for two reasons. First, because of the miniaturisation and decrease in cost of electronic components, most systems provide multiple channels of input, and hence fall into the third category. Second, there is an overlap between the fourth category and the others, as intelligent footwear may also provide toggle actions and control one or more parameters.

Because of the wide variety of foot-based interfaces found in the literature, rather than trying to find an all-encompassing taxonomy, in this paper, we analyse the literature under three different lenses: the users, the systems and the interactions between them. From the user perspective, we draw from the literature in Biomechanics and Kinesiology [Lippert 2011] to analyse specific movements of the lower limbs. Saffer performs a similar analysis for full body gestures and touch interfaces [Saffer 2008].

From the system perspective we investigate input and output devices. Our classification borrows from general input devices taxonomies, such as Hinckley et al.'s [Hinckley and Wigdor 2002], [Hinckley et al. 2004]. For certain categories of devices, we refer readers to more specific surveys, for example, on pedals [Trombley 1966] and on locomotion interfaces [Hollerbach 2002].

Finally, from the interactions perspective, we classify different actions that can be performed with the lower limbs. Karam and schraefel defined a taxonomy for hand gestures in HCI [Karam and schraefel 2005] and proposed five categories for gesture styles: deictic, manipulative, semaphoric, gesticulation and language gestures. For an overview of gesture taxonomies, see Billinghamurst and Buxton [Billinghurst and Buxton 2011].

3. CHARACTERISTICS OF USERS

The design of interactive systems is usually optimised for the movement and capabilities of the hands. Therefore, it is essential to understand the strengths and limitations of the lower limbs, especially in comparison with the arms and hands, in order to design interfaces that take their motion range, weight and speed into account.

We start our discussion of the user perspective by looking at the anatomy of the legs and feet (Section 3.1) and how the movement on each of their joints is used for interaction (Section 3.2). We then analyse how the pose of the user (sitting, standing or walking/running) impacts interaction (Section 3.3), as well as accessible input (Section 3.4). Finally, we look at the nonverbal, cultural, and cognitive issues associated with the legs and feet (Sections 3.5 and 3.6).

3.1. Anatomy

One of the features that sets humans apart from other primates is upright walking, which could date from the earliest phase of human evolution [Lovejoy 1988]. Whereas our close cousins use all four limbs for locomotion, we only use our legs. This provided an evolutionary advantage as it allowed us to carry more food, better gather small food from short trees, expose less skin to direct sunlight, free our hands to use tools or carry babies over long distances, spend less energy when walking at reduced speeds, see further whilst walking, and appear more threatening to predators [Weaver and Klein 2006]. The downside is that we not only lost speed and agility, but also have a much more reduced ability to climb trees [Lovejoy 1988]. Also, due to the constant muscle tension applied to stabilise our bodies and to the much shorter length of the toes compared to the fingers, we lost prehensility—the ability to grasp—in our feet. The direct implication for HCI is that graspable interfaces, such as the regular mouse, are unsuitable for the feet. Therefore, interfaces with moving parts often need to provide some way of securing itself to the foot, for example, by offering straps or high-friction surfaces.

The foot is a complex structure comprising 26 bones (tarsals, metatarsals and phalanges), over 100 ligaments, muscles and tendons that work together to maintain balance and propel the human body. The bones of the foot are arranged in three arches, two along its length and one across it. These arches stabilise our bodies in the upright position while giving an elastic springiness to it [Dawe and Davis 2011]. The foot can be divided into three parts: the hindfoot (where the heel is), the midfoot, and the forefoot (where the ball and toes are). Because of this structure, the feet have a very distinctive and asymmetrical shape that can be recognised by vision-based systems [Augsten et al. 2010]. In the gait cycle, these parts touch the ground in sequence, a pattern that has been explored in several projects to estimate user movement (Section 4).

The entire lower extremity of our bodies weigh on average approximately 31.2% of our body mass, of which 19.4% is from the thighs, 9.0% from the legs and 2.8% from our feet [Dempster 1955]. Because the lower limbs weigh a lot more than the upper limbs, their movement tends to be more tiring and lead to cramps if used extensively [Engelbart 1984].

3.2. Kinematic Analysis of the Joints







For our purposes, the movement of the lower limbs is mostly performed by three joints on each leg: the ankle, the knee and the hip. Table I shows the distribution of the ranges of motion for each movement of these joints [Roaas and Andersson 1982].

3.2.1. Ankle. The ankle joint is capable of three types of rotation, each in two directions: dorsiflexion/plantarflexion, abduction/adduction and inversion/eversion.

Dorsiflexion is the movement that decreases the angle between the top of the foot and the leg. Plantarflexion is the movement that increases this same angle. These are the movements used to operate pedals [Kroemer 1971]. Momentary pedals, which require users to push against a spring, require more force on the plantarflexion, since the spring assists the dorsiflexion, but rocker pedals require the user to push in both directions. Depending on where the foot is anchored, these movements can be interpreted as two separate gestures. If the foot is anchored at the ball, it is considered as heel tapping and if it is anchored at the heel, it is considered as toe tapping. Pedals typically anchor the foot at the heel, but in English et al.'s control, its vertical movement was anchored at the ball [English et al. 1967].

Inversion is an inward twisting movement, whereas eversion is an outward twisting movement. The range of motion along this axis is very limited. These movements are

Table I: Normal range of motion of the right hip, knee and ankle joints in male subjects, 30-40 years of age

				Range of Motion (°)	
Joint	Movement	Mean	SD		
Ankle	Dorsiflexion	15.3	5.8		
	Plantar flexion	30.7	7.5		
	Inversion	27.7	6.9		
	Eversion	27.6	4.6		
Knee	Flexion	143.8	6.4		
	Extension	1.6	2.8		
Hip	Flexion	120.3	8.3		
	Extension	9.4	5.3		
	Medial rotation	32.6	8.2		
	Lateral rotation	33.6	6.8		
	Abduction	38.8	7.0		
	Adduction	30.5	7.3		

Source: Roaas and Andersson [Roaas and Andersson 1982]

often combined with other rotations into supination (a triplanar movement in which the foot moves down and towards the center of the body, combining inversion, plantarflexion and adduction) and pronation (a triplanar movement of the subtalar joint in which the foot moves up and away from the centre of the body, combining eversion, dorsiflexion and abduction). Supination and pronation are the movements typically used to move foot joysticks horizontally as they allow for a shift of weight of the foot with little movement.

Abduction is the movement of the foot away from the centre line of the body and adduction is the movement towards it. As a gesture these movements are interpreted as heel rotations (if pivoting around the heel) or as toe rotations (if pivoting around the toe) [Scott et al. 2010]. An example of an interface that is controlled by abduction and adduction is Zhong et al.'s *FootMenu* [Zhong et al. 2011], in which the user pivots the foot around the heel to control the horizontal movement of the cursor.

3.2.2. Knee. The knee has two degrees of freedom: rotation and flexion/extension. Because knee rotation assists foot abduction/adduction, we will not treat them separately. Knee flexion is the movement that decreases the angle between the leg and the ankle, whereas knee extension is the movement that increases it. As a gesture, these movements combine into a “kick” [Paelke et al. 2004]. Han et al. investigated user accuracy in the direction and speed of kicks [Han et al. 2011]. The authors found that targets should cover at least 24° and that users have difficulty in controlling the velocity of the kick, but can remember two broad ranges of velocity. The knee has also been used directly to operate mechanical controls, such as English et al.'s lever [English et al. 1967]. Early pianos also contained knee levers instead of pedals [Rosenblum 1993], an idea that has since been revived to allow users with below-knee amputation to play the piano [Odom et al. 2006].

3.2.3. Hip. The hip rotates in three directions: flexion/extension, abduction/adduction and outward/inward rotation. Because rotations around the hip involve moving the whole leg, they are usually tiresome to be used for HCI, but they often assist the movement of other joints. For example, when standing upright, kicks can be enhanced by using the force from the leg [Paelke et al. 2004],[Han et al. 2011]. Abduction and adduction are used when moving foot mice or free gestures horizontally [Velloso et al. 2015a]. The hip can also be moved to shift the centre of mass of the body, which is used in pressure sensitive interfaces, such as the Wii Balance board [Williams et al. 2011],[Xavier et al. 2011]. An example of a mechanical interface that directly uses the hips is Beckhaus et al.'s *ChairIO*, an augmented stool that acts as a joystick as the users move their hips [Beckhaus et al. 2005a],[Beckhaus et al. 2005b],[Beckhaus et al. 2007].

3.2.4. Toes. Because the toes are harder to control than the fingers and are often covered by shoes, they are very seldom used for interaction. The exceptions are toe switches embedded into shoes, such as the one described by Thorp [Thorp 1998] and the ACHILLE insole, that contains a toe switch for controlling a prosthetic arm [Carrozza et al. 2007].

3.2.5. Multiple Joints. Different combinations of knee and hip movements allow the foot to move in different topologies. Pearson and Weiser presented four topologies for surface-based foot interaction that illustrate these movements when constrained by a desk well (i.e. the space under the desk) whilst seated [Pearson and Weiser 1986]. A planar topology is defined by a plane that might be tilted by a certain angle. A cylindrical topology ideally has a radius equal to the height of the user's knee, with the main axis crossing the knee. A toroidal topology is defined by a minor radius equal to the height of the knee centred at the knee and a major radius equal to the length of the

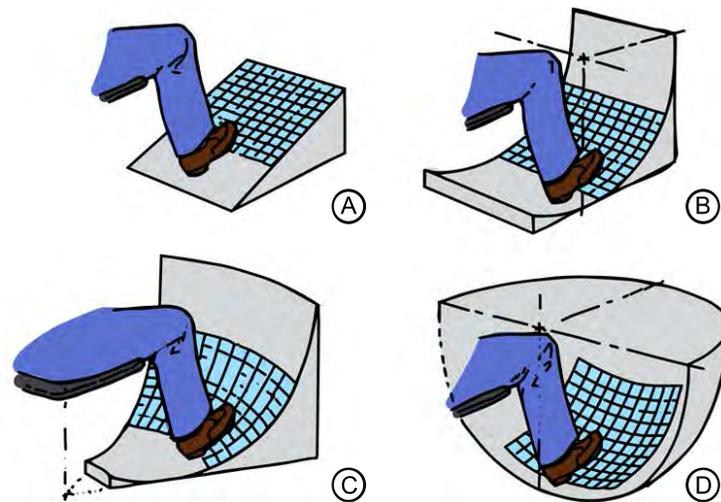


Fig. 1: Topologies for surface-based foot movements in a seated pose (Adapted from [Pearson and Weiser 1986]): (A) Planar, (B) Cylindrical, (C) Toroidal, (D) Spherical

thigh centred at the hip. Finally a spherical topology has a radius equal to the height of the knee centred at the knee.

These different topologies aim at facilitating the movement for specific joints: in the spherical topology vertical and horizontal movements are optimised for the knee; in the toroidal topology, vertical movement is optimised for the knee and horizontal movement for the hip; and in the cylindrical topology, vertical movement is optimised for the knee. Vertical and horizontal movement in the planar topology and horizontal movement in the cylindrical topology require combinations of knee and hip movements to reach the whole space, but may be simpler for users to understand.

All these topologies constrain the movement of the foot to a two-dimensional plane existing in the three-dimensional space. When this constraint is removed we have the free three-dimensional movement common in movement-based interactions, such as in full body games. These movements use a combination of several joint rotations.

3.2.6. Gait. When walking/running, users will use combinations of all these movements. The gait cycle (i.e. the pattern of movement during walking) comprises four stages [Morley Jr et al. 2001], [Huang et al. 2006]. It begins when the hindfoot touches the ground (heel strike). Then, the forefoot touches the ground, stabilising the foot and the body (forefoot contact) until the weight of the body is directly over the foot and the opposite foot is swinging from the rear of the body (midstance). Next, the heel lifts from the ground and the weight shifts to the front of the foot, as the opposite foot touches the ground (heel off). Finally, the foot pushes the body forward and enters the swing phase until the cycle restarts (propulsion).

3.3. Pose

The pose in which the system will be used significantly affects the design of the interface. We found in the literature three main poses in which foot-operated systems are used: sitting, standing and walking/running. We analysed how the poses affect different properties of the interaction, namely the users' interaction range, the gesture vocabulary, fatigue, challenges for design and operation of other devices (Table II).

Table II: Properties of Different Poses

	Pose	Range	Gesture Vocabulary	Fatigue	Challenges	Other Devices
Sitting		+	+++	+	Desk well, Occlusion	Desktop Computers
Standing		++	++	++	Balance, Tracked Area	Public Displays, Multitouch tables, Mobile devices
Walking Running		+++	+	+++	Limited attention and cognition	Mobile devices, Music players, artistic installations

3.3.1. Interaction Range. When seated, a user’s interaction range is limited to the feet’s reach. While swivel chairs allow for reaching locations beyond that by rotating or pushing the chair, chairs with no moving parts require users to either adjust their pose or clumsily reposition the chair when trying to reach further targets [Velloso et al. 2015a]. Also, targets may be placed on the chair itself, for example, switches mounted on the legs of the chair. By standing upright, users are able to reach further and by walking towards targets, they can reach indefinitely far targets [Augsten et al. 2010], [Bränzel et al. 2013], [Grønbaek et al. 2007], [Orr and Abowd 2000],[Schmidt et al. 2014].

3.3.2. Gesture Vocabulary. The type of contact between feet and floor in a pose determines the range of possible gestures. The sitting pose allows users to take their feet off the floor simultaneously, thus multi-feet and mid-air gestures are possible [Velloso et al. 2015a],[Simeone et al. 2014]. Yet, lifting both feet repeatedly or for a prolonged time leads to fatigue. Standing limits the available vocabulary to single-foot gestures, as the other foot maintains the body’s balance. At the same time, however, the increased mobility allows for larger gestures, such as kicking or jumping, and for reaching further targets. When walking/running, arbitrary gestures are more difficult because the feet are busy in the gait cycle. Instead, the movement itself is often used as replacement, for example by mapping the real-world movement to movement in virtual environments, or by using different walking patterns to issue commands [Yamamoto et al. 2008].

3.3.3. Fatigue. The pose in which the user interacts with the system will also dictate how long the user may interact with it. Users typically have no problem sitting down and to a lesser extent, standing upright, for long periods of time, but walking and running will be tiresome to different degrees depending on the user’s physical fitness. Whereas there are no long-term studies on foot interaction in HCI, piano players and car drivers are able to operate pedal-based interfaces for extended periods of time. However, in pedal-based interfaces, whereas users can minimise fatigue by resting their foot on top of the pedal without intending to activate it—a behaviour called *riding the pedal*—this can lead to accidental activation [Barnett 2009]. In terms of movement direction, Velloso et al. found forward and backward foot movements to be more tiring than left and right ones [Velloso et al. 2015a].

3.3.4. Challenges. When users are sitting, they are often sat in front of their desks. This spatial configuration constraints the movement in two ways. First, the movement is restricted by the size of the desk well [Pearson and Weiser 1986],[Velloso et al. 2015a]. This not only limits the area where users may move their feet, but because the desk well is often cluttered with cables and power plugs, the movement may be affected. Second, the desk occludes the feet, which prohibits direct input devices, such as Multitoe [Augsten et al. 2010].

When users are standing, movement is usually constrained by users' balance, which will determine how well they can perform mid-air or floor-touch gestures in a stable manner.

The biggest constraint in walking/running foot interaction is the limited attention and cognition as the user is busy moving through the world. Any deviation of users' normal gait pattern may increase the risk of tripping or losing balance.

3.3.5. Interaction with Other Devices. The pose is also influenced by the choice of other devices with which the foot interface will interact. For example, when sitting down, foot interfaces are usually used to interact with desktop computers, together with mice and keyboards [Pakkanen and Raisamo 2004],[Velloso et al. 2015a]. When standing up, they are usually used for interaction with public displays [Saunders and Vogel 2015],[Jota et al. 2014], multitouch tables [Richter et al. 2012], [Sangsuriyachot et al. 2011] and mobile devices [Han et al. 2011],[ur Réhman et al. 2012]. When walking/running, the feet normally interact with music players [Bieber and Diener 2005],[Moens et al. 2010], mobile devices [Yamamoto et al. 2008] and artistic installations [Choi and Ricci 1997],[Paradiso and Hu 1997].

3.4. Accessibility

Bergman and Johnson define accessibility as “removing barriers that prevent people with disabilities from participating in substantial life activities, including the use of services, products and information” [Bergman and Johnson 1995]. Together with head-mounted pointing devices and eye trackers, foot-operated interfaces offer an accessible alternative to hand-operated interfaces for people with impairments in their hands, including repetitive strain injury, arthritis, carpal tunnel syndrome, limb loss, etc. Several works in the literature investigate these devices explicitly for this purpose [Springer and Siebes 1996], [Carrozza et al. 2007]. While these interfaces may provide relief for tired wrists, continued use may also strain the ankles, causing further pain and discomfort. It can also be more tiring and lead to cramps if used extensively [Engelbart 1984].

Foot-operated interfaces for accessible input go even beyond computer control. For example, it is now possible to modify cars to allow them to be steered using the left leg through a rotating foot plate. There are also solutions for users with partial impairment on the feet. For example, vacuum-assisted braking can be installed in cars for users who find it difficult to press down the pedal. Also, foot slip prevention devices, such as straps and rubber surfaces can be attached to pedals to prevent the foot from slipping from the device, which can help users with difficulties in performing certain movements.

Interfaces that are exclusively operated by the lower limbs also create new accessibility problems. As with any body-based interfaces, interaction designers must take into consideration limitations for each individual. People in wheelchairs and crutches or with other disability or impairment on the lower limbs will have difficulty or even impossibility of using such devices. Also, short people might find difficult reaching far targets on the floor if sitting on a high chair. Therefore, it is good practice to provide input alternatives for these users.

In this paper, our focus is broader than accessible input, so we analyse the research space from the point of view of users with no disabilities. However, it is also important to take into account how individual disabilities affect interaction design. For example, a user with a motor control disability in his hands will not be able to use certain multimodal combinations of foot-based interaction. In Section 4, we overview different devices that can be used for foot-based accessible input, even when not necessarily designed for this purpose.

3.5. Nonverbal Behaviour & Cultural Issues

Both scientific and anecdotal evidence suggest the feet give away clues to our internal states. Joe Navarro, an ex-FBI counter-intelligence officer and body language expert considers the feet as “the part of the body that is most likely to reveal a person’s true intentions” [Navarro and Karlins 2009]. In social interactions, we tend to focus on each other’s faces, so the legs and feet tend to escape our attention. This makes the lower limbs particularly good at providing clues to how people are really feeling—what psychologists call *nonverbal leakage* [Morris 2002].

In Section 3.1 we explained how our lower limbs evolved to support our bipedalism. As they became our main means of locomotion, our limbic system—the part of our brains responsible for, amongst other functions, our emotions and our fight-or-flight mechanisms—evolved to quickly activate the legs and feet to escape from danger or confront predators. Even though we do not face such challenges today, these hard-wired evolutionary mechanisms still manifest themselves in our nonverbal behaviour.

For example, quick movements of the feet are indicative of anxiety. In a study with students learning foreign languages, Gregersen reported that anxious students continuously bounced, jiggled and tapped that feet, whereas non-anxious students only crossed and uncrossed their legs a few times [Gregersen 2005].

We send nonverbal signals not only through feet movements, but also through their overall posture. For example, Mehrabian [Mehrabian 1968] relates the symmetry of leg posture to how relaxed the person is: the more asymmetrical the posture, the more relaxed the person. He defines four categories of symmetry in ascending degree of relaxation: symmetrical position of the legs with both feet flat on the floor and the insteps touching; symmetrical position of the legs with both feet flat on the floor and the insteps not touching; asymmetrical stance of the legs with both feet resting flat on the floor, asymmetrical stance of the legs with one or both feet partially lifted off the floor.

The behaviour of our feet is also unconsciously influenced by the behaviour of the people around us — because of the so-called *Chameleon Effect*, we tend to mimic the behaviour of the people we are talking to. In Chartrand and Bargh’s study, participants were more likely to tap their feet during a task when their confederate was also tapping his feet [Chartrand and Bargh 1999]. Different leg postures also influence the rapport between people interacting. Harrigan et al. investigated the nonverbal cues in physician-patient rapport and found that high rapport physicians were more likely to sit with their legs uncrossed, with their bodies orientated toward the patient, but there was no difference in feet movement between high-rapport and low-rapport doctors [Harrigan et al. 1985].

Certain behaviours of the legs and feet vary in different cultures. In several cultures, especially in South Asia, the feet are considered dirty and pointing with the feet or exposing the sole of the foot may be considered rude or insulting [Juckett 2005]. Wagner et al. investigated the social acceptability of touching on-body targets and found that targets on the lower limbs were significantly less acceptable than on the upper limbs [Wagner et al. 2013]. In China, bound feet used to be considered sexually appealing in women and some men preferred never to see their feet, which were constantly con-

cealed by shoes and wrapping. This practice was banned in 1949 and the ban remains in effect since.

Some leg postures can also be perceived differently by distinct cultures. For example, certain American men can perceive the way European men cross their legs (with one knee crossed over the other) as slightly effeminate [Morris 2002]. However, with more cultural exchange around the world these cultural differences tend to be minimised as we can see both Europeans sitting with the ankle over the knee and Americans with one knee over the other [Morris 2002].

These are just a few examples of how people's psychological states and culture are perceived and manifested through their feet. For an in-depth treatment, see Morris [Morris 2002] and Argyle [Argyle 1988]. We return to the topic of how this natural behaviour can be leveraged in HCI in section 5.3.

3.6. Embodied Cognition

Recent developments in the Cognitive Sciences and Philosophy suggest that “people's subjective, felt experiences of their bodies in action provide part of the fundamental grounding for human cognition and language” [Gibbs 2006]. In other words, our bodily experiences shape the way we think. This kind of analysis is extremely relevant to HCI, as the bodily gestures used to interact with a given system will significantly impact how we think about the task at hand. Whereas a complete account of Embodied Cognition is outside the scope of this paper, we will discuss a few results that relate to the legs and feet.

Behavioural studies suggest that participants are faster in reacting with the appropriate effector (e.g. hands or feet) when it matches the action in a given sentence. For example, Buccino et al. asked participants to respond to concrete sentences using the hand or the foot and not to respond to abstract sentences, and found that reaction times were shorter when the effector corresponded to the sentence than when it did not [Buccino et al. 2005]. Similarly, Scorolli and Borgui asked users whether certain hand and foot actions (e.g. to throw vs. kick a ball) made sense or not and recorded responses with a microphone or a pedal [Scorolli and Borghi 2007]. Again, they found responses to be faster when the effector matched the action.


A possible explanation for this phenomenon is that just thinking about words referring to specific body parts tend to activate areas of the brain that are also activated when actually moving those body parts. For example, Hauk et al. presented participants with words regarding leg, arm and face movements and recorded participants brain activity with fMRI. These authors found a high correlation between the words being read and the body part associated with that action [Hauk et al. 2004].

In summary, reading and thinking about actions related to the lower limbs, such as kicking and walking, tend to also activate the areas of our brains activated when we actually perform those actions. This, in turn, leads to faster reaction times for when we use the body part corresponding to the action we are thinking about. The significance of such findings for HCI is that using the feet for tasks where we normally think of as being performed by the feet can possibly yield better performance, at least on a neurological and cognitive level. However, these gains can be offset by the generally worse dexterity and heavier weight of the legs, as compared with other body parts (see Section 5.2).

4. FOOT-BASED SYSTEMS

In the previous section we discussed how users' body pose and movement affect the interaction. In this section we describe and categorise research prototypes and commercial systems that take input from the feet (Section 4.1) and discuss different ways of providing feedback in foot-based interactions (Section 4.2).

Table III: Categories of foot input sensing

		Instances	Passive Feedback	“Always-On”
Mediated		Foot switch, pedal, knee control, foot mouse, foot joystick, trackball, moles, balance boards	+++	+
		Augmented shoes, augmented insoles	++	+++
Extrinsic		IR-based trackers, vision- and depth-based trackers, laser range finder, augmented floors and surfaces	+	++

4.1. Input Sensing

Foot-operated input devices exist in a variety of shapes and sizes—from small foot mice, to room-sized augmented floors. In this section, we classify these devices into a taxonomy according to how they capture input from the feet: mediated, intrinsic and extrinsic sensing (Table III). Mediated sensing happens when the feet are not tracked directly, but rather through devices operated by them. Intrinsic sensing refers to when the feet are tracked through sensors directly attached to them and extrinsic sensing refers to when the feet are tracked through sensors placed on the environments.

4.1.1. Mediated Sensing. In mediated sensing, instead of tracking the feet directly, sensors track devices operated by the feet. This category comprises mechanical devices such as foot mice, trackballs and pedals, which contain moving mechanical parts that capture input from the feet. As a result, such devices provide immediate passive haptic feedback on the actual input action. They are usually found in the form of computer peripherals, and hence only capture input when the user is directly interacting with the device.

The oldest, most widely known and most thoroughly studied foot interface is the **pedal**. Pedals are employed in a wide variety of contexts: cars, bicycles, boats, aircrafts, pianos, harps and guitar effects are some examples from outside the world of computing. Due to the safety-critical role that pedals play in cars and machinery operation, studies looked into finding optimal pedal designs, which go as far back as 1942 [Barnes et al. 1942]. See Trombley [Trombley 1966] for a review of early work on pedal operation and Rosenblum [Rosenblum 1993] for a review of the role of pedals in pianos.

The simplest form of a pedal is a **binary switch**. Examples include foot operated light and tap switches and transcription pedals that have multiple switches for controlling playback. As with any switch, they can be **latching** or **momentary**, depending on whether it returns to its initial state once the user releases it. As Sellen et al. point out, momentary pedals provide advantages for selecting the mode of operation of software systems because they require users to actively maintain the state by holding down the foot—its kinaesthetic feedback is more difficult to ignore reminding users of which mode they are currently in [Sellen et al. 1992].

Rather than sensing discrete states, pedals also allow for controlling continuous parameters, such as the acceleration of a car. In this mode, it is necessary to choose an adequate mapping between the pedal and the parameter being controlled: a 0-order

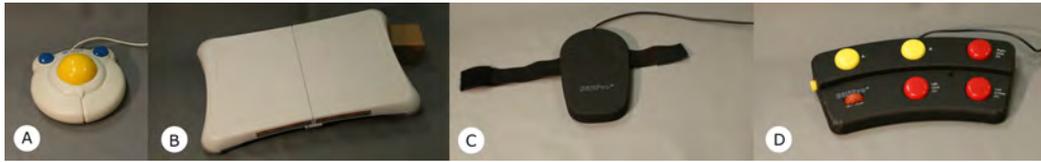


Fig. 2: Mediated sensing using computer peripherals: (A) large trackball [Pakkanen and Raisamo 2004]; (B) Nintendo Wii Balance Board [Daiber et al. 2009]; (C,D) BiliPro Foot Mouse and Keys

control alters the value of the parameter directly, while a 1st-order control alters the rate of change of the parameter. For example, Kim et al. compared 0-order and 1st-order pedals for setting font sizes in a text entry task and found the performance of the 1st-order control to be comparable to the mouse [Kim and Kaber 2009]. Similarly to foot switches, continuous pedals can also be momentary or latching.

Pedals often ship in sets of two or three, as they are commonly employed in vehicle simulators. A more complex setup is that of flight simulator rudder pedals. The pedals in these devices pivot around the centre to control the plane’s rudder, offering an additional dimension of control.

Other examples of works that use pedals include controlling a 3D modelling application [Balakrishnan et al. 1999], text entry [Dearman et al. 2010], supporting gaze input [Göbel et al. 2013] and toggling the mode of operation of a piano keyboard [Mohamed and Fels 2002]. Zhong et al. implemented a pivoting pedal that rotates around the heel in addition to up and down [Zhong et al. 2011].

Safety-critical applications of pedals should also take into account some problematic issues. First, people seldom scrutinise the floor when they are working, so they might trip on pedals. Also, “riding the pedal”—which happens when the user stops pressing the pedal, but remains with the foot on top of it—is the most prevalent cause of their accidental activation [Barnett 2009].

Despite the pedal being around for a long time, it was not the first foot operated interface for a computing system. Among the first alternatives for controlling a cursor, the same team that invented the mouse developed a **knee control** consisting of two potentiometers linked to a knee lever, which was controlled by the user by pushing the lever side-to-side or up and down [English et al. 1967].

The term **foot mouse** has been used for different kinds of foot-operated devices. In this paper, we restrict the term to devices that work in the same way as the hand mouse, while being moved by the foot. Therefore, the physical property that is used as input is the position of the foot. These include commercial products such as the *BiLiPro Foottime Foot Mouse* (2006) and research prototypes such as the puck on a Wacom digitising tablet that Balakrishnan et al. used to control the camera in a 3D modelling application [Balakrishnan et al. 1999].

Foot joysticks (also often called foot mice in the literature, e.g. [Springer and Siebes 1996]) are controls in which the user nudges the device in a specific direction to control the speed of movement of the cursor in that direction. The *Versatron Foot Mouse* (1984) is the first example of such interface and was controlled by sliding with the foot a rubber platform spring-loaded to return to the central position. The more recent *No Hands Mouse* uses two devices: one foot joystick to control cursor position and one to control mouse clicks. Such devices are usually mapped as 1st-order controls, similarly to hand-operated joysticks.

Garcia et al. studied learning effects of users interacting with this device [Garcia and Vu 2009], [Garcia and Vu 2011]. Research prototypes of foot joysticks include the



Fig. 3: Example scenario for the use of foot gestures through intrinsic sensing. The user interacts with his tablet by kicking in the air [Han et al. 2011]

works of Springer and Siebes [Springer and Siebes 1996] and Göbel et al. [Göbel et al. 2013].

Large trackballs have also been used for foot-operated cursor control, such as the *BIGtrack Trackball* and the *AbleTrack Trackball*. Mouse clicks are usually operated by external foot switches. Pakkanen et al. suggest that such interfaces are appropriate for non-accurate tasks [Pakkanen and Raisamo 2004].

Some devices use the distribution of the user's **weight** to control two-dimensional variables. An early video-game controller that used this principle was the *Amiga Joy-board* (1982), which contained the four directional latches of a joystick on the bottom of the board and by leaning in a certain direction, the user engaged these latches and controlled the game. The *Nintendo Wii Balance Board* (2007) uses four pressure sensors to measure the user's centre of balance and has been used for several purposes beyond entertainment including fitness, navigating maps [Schöning et al. 2009] and navigating 3D environments [Xavier et al. 2011].

Pearson and Weiser created several early prototypes of foot interfaces, dubbed "**moles**", as the "beasts are situated under-foot" [Pearson and Weiser 1986]. These authors proposed the term for the category of devices that are operated by the feet in a similar manner to the mouse, but it was not subsequently picked up by other authors. Instead, the term ended up referring to the multiple prototypes these authors built in the 1980's, which used a rig under the desk to simulate mouse input. In a second work, they implemented a planar mole featuring a pedal that slid in all four directions constrained to a plane [Pearson and Weiser 1988a]. In a third one, they built two versions of the swing mole, in which the cursor is controlled by the right foot, which slid left and right on a platform that rotated along an axis inside the desk well from the front desk edge [Pearson and Weiser 1988b].

A final category of mediated sensing input devices are **locomotion interfaces** for virtual reality. These devices use repetitive movement of the user's limbs to navigate through virtual environments. For a full treatment of this category, we refer the reader to Hollerbach's survey [Hollerbach 2002]. Hollerbach categorises locomotion interfaces as *pedalling devices* (e.g. bicycle simulator [Brogan et al. 1998] and the Sarcos Uniport (1994)), as *walking-in-place devices* (e.g. *Gaiter* [Templeman et al. 1999]), as *foot platforms* (e.g. Sarcos Biport, *GaitMaster* [Iwata et al. 2001]) and as *treadmills* (e.g. the Sarcos Treadport, the Omni-Directional Treadmill [Darken et al. 1997])

4.1.2. Intrinsic Sensing. Intrinsic sensing devices contain sensors directly coupled to the legs and feet. These systems are typically wearable and self contained, requiring little

to no instrumentation on the environment, thus allowing users to move freely. Because of this increased mobility, these systems typically monitor users' walking patterns to make inferences about the user. Such systems usually come in the form of sensors and actuators augmenting users' insoles or their whole shoes. They are typically *always-on*, meaning that they continuously track users as long as they are wearing the device, without explicit user interference. Among their guidelines for wearability, Gemperle et al. suggest that the areas of the lower limbs more suitable for mounting wearable devices are the waist and hips, the thigh, the shin, and the top of the foot [Gemperle et al. 1998]. The reasons for this are that these are areas that are relatively the same size across adults; have low movement and flexibility, even when in motion; and are large in surface area [Gemperle et al. 1998].

The first documented wearable computer was in fact manipulated by the feet. Thorp describes how in the 1950's and 1960's he developed a wearable computer to predict the outcome of casino roulette wheels operated inconspicuously using a toe switch in his shoes [Thorp 1998]. The increased interest in Wearable Computing in the late nineties sprung a variety of projects interested in augmenting users' shoes. In an early article on the topic, Mann mentions building trainers that measured his pace [Mann 1997].

Wearable interfaces rely on sensors and devices worn by the user that capture information from the user's feet. Table IV shows the sensors used in previous work. The most common sensors in smart shoes are **pressure sensors** in the form of force sensitive resistors. By distributing such sensors on different points of the sole, it is possible to calculate the weight distribution of the user and infer gait patterns. **Bend sensors** work in a similar manner, by changing their resistance as they are flexed. These are usually installed in the middle of the foot to detect when the foot is bending, such as in the beginning and end of the gait cycle. In the context of gait analysis, whereas pressure sensors can provide steady-state pressures as the toes bear down, the bend sensors give a differential sensor that correspond to the attack and release of the heel [Paradiso et al. 2000].

Another widely employed category of sensors are inertial measurement units, which comprise different combinations of **accelerometers**, **gyroscopes** and **magnetometers**. With such sensors, it is possible to use movement information to estimate the position and orientation of the foot, which, in turn, can be used for analysing gait and for explicit interaction with computers. Whereas such sensors can provide accurate measurements of roll, pitch, and yaw (i.e. the orientation of the foot); their absolute position estimates tend to drift over time [Fischer et al. 2013]. They also work well for detecting relative movements, such as kicks and other gestures [Alexander et al. 2012].

All the sensors described so far measure the movement, orientation and configuration of the foot, but sensors that attempt to make sense of the environment around it — both inside and outside the shoes — have also been explored in the literature, such as **humidity**, **light** and **distance** sensors [Morley Jr et al. 2001].

A challenge for wearable devices is how to power all these sensors and processing units. When we walk, we generate kinetic energy, which can be harnessed by augmented shoes using **piezoelectric** elements. These components convert the mechanical stress created by the foot when pushing down against the floor into electric current. Even though the current generated is not much, it is enough to power active RFID tags [Orecchini et al. 2011] or low-power components.

Paradiso et al. describe several iterations of trainers—dubbed *Expressive Footwear*—augmented with pressure, bend, position, acceleration and rotation sensors for interactive dance performances [Paradiso and Hu 1997], [Paradiso et al. 1998], [Paradiso et al. 1999], [Paradiso et al. 1999], [Paradiso et al. 2000] and interactive therapy [Paradiso et al. 2004]. *CyberBoots* was another early work aimed at interactive performances,

Table IV: Sensors in selected prototypes of augmented shoes

Reference	Pressure	Acc.	Gyro.	Bend	Temp.	Humidity	Light	Distance	Application
<i>In-Shoe Multisensory Data Acquisition System</i> ¹ [Morley Jr et al. 2001]	✓				✓	✓			Patient monitoring
<i>Expressive Footwear</i> [Paradiso et al. 2000]	✓	✓	✓	✓				✓	Artistic performance
<i>CyberBoots</i> [Choi and Ricci 1997]	✓								Artistic performance
<i>Shoe-Mouse</i> [Ye et al. 2005]	✓	✓	✓	✓					Cursor control
<i>Shoe Shaped Interface</i> [Watanabe et al. 2005]	✓								Inducing a gait cycle
<i>Intelligent Shoes</i> [Huang et al. 2006]	✓	✓	✓	✓					User identification
<i>ACHILLE</i> [Carrozza et al. 2007]	✓								Control of prosthetics
<i>CabBoots</i> [Frey 2007]		✓	✓				✓	✓	Assisting navigation
<i>Shoe-Shaped I/O Interface</i> [Higuchi et al. 2010]		✓							Artistic performance
<i>Sonic Shoes</i> [Lécuyer et al. 2011]	✓								Auditory feedback
<i>Rhythm 'n' Shoes</i> [Papetti et al. 2011]	✓								Artistic performance
<i>Shoe-Keyboard</i> [Tao et al. 2012]	✓	✓							Character input
<i>ShoeSoleSense</i> [Matthies et al. 2013]	✓								Virtual reality

which consisted of boots that could be worn over the user's shoes to detect walking and leaning patterns from pressure sensors mounted on the insoles [Choi and Ricci 1997]. More recently, other works that used foot mounted sensors for artistic purposes include geta clogs augmented with a *Nintendo Wiimote* and a pico projector for guitar performances [Higuchi and Nojima 2010], and sandals that detect foot tapping to create accompanying drums [Papetti et al. 2011].

By installing sensors on users' shoes, it is possible to unobtrusively monitor their gait patterns anywhere they go. Applications for this kind of technology include detecting abnormal gait patterns [Chen et al. 2008]; identifying users by their gait [Huang et al. 2006]; adjusting music tempo to match the user's pace [Hockman et al. 2009]; navigating in virtual environments [Matthies et al. 2013]; inducing a specific walking



Fig. 4: Extrinsic sensing from below with an FTIR floor [Bränzel et al. 2013] and from above with a Kinect sensor [Simeone et al. 2014]

cycle [Watanabe et al. 2005]; assisting navigation [Frey 2007]; and even changing the noise of users' footsteps [Lécuyer et al. 2011]. A commercial example is the *Nike+iPod* (2006) line of trainers, which measures and records the distance and pace of a walk or run. From users' gait pattern it is also possible to infer their trajectories using a technique called *pedestrian dead reckoning*. Fischer et al. describe how to achieve this using inertial sensors mounted on the foot [Fischer et al. 2013].

Augmented shoes have medical applications. Morley et al. installed pressure, temperature and humidity sensors to measure environmental conditions inside diabetic patients' shoes [Morley Jr et al. 2001]. The commercial product *SurroSense Rx System* also aims at assisting diabetes patients by collecting pressure data on the insole to help prevent foot ulcers. Carrozza et al. installed switches on the insole of a shoe to control a prosthetic biomechatronic hand [Carrozza et al. 2007].

Motion sensors on the feet have also been used to detect gestures for explicit human-computer interaction, including using augmented shoes to emulate a conventional mouse [Ye et al. 2005] and keyboard [Tao et al. 2012]. Gesture-based foot interaction is particularly interesting for mobile devices. Crossan et al. investigated foot tapping for interacting with a mobile phone without taking it out of the pocket using an accelerometer on the top of the user's feet [Crossan et al. 2010]. Scott et al. investigated such gestures can be recognized using the sensors in a mobile phone inside the user's pockets [Scott et al. 2010]. Alexander et al. collected a foot gesture set suggested by users to control a mobile device [Alexander et al. 2012].

4.1.3. Extrinsic Sensing. Interfaces in this category rely on sensors placed on the environment to capture data from users' feet from the outside. They usually require little or no instrumentation on the user and are *always-on* as long as the user is within the tracked area. They typically offer little to no passive haptic feedback.

Several studies of foot interaction rely on **passive infra-red motion capture** systems to track the feet. These systems use infra-red cameras to capture the light reflected by markers attached to different points on the user's legs and feet. They are usually very accurate, but require several cameras depending on how large is the volume being tracked and require direct line of sight between the markers and the cameras. Moreover, the need for special markers attached on the users' bodies makes them unsuitable for casual interactions. *The Fantastic Phantom Slipper* was a pair of slippers with reflective markers and vibration motors used for interacting with a virtual environment [Kume et al. 1998]. Quek et al. used a passive IR system to track users' feet in order to estimate participants' attentional focus from their feet posture [Quek et al. 2008].

Vision-based systems use data from one or more colour cameras to extract the feet's position and orientation. The advantage of such systems is that they require

little more than a camera, making them easy to deploy. The downside usually comes in loss of accuracy and the need for direct line of sight. *AR-Soccer* is a football game using the camera in a PDA by extracting the contour of the user's foot and detecting its collision with a virtual ball in order to kick the ball towards the goal [Paelke et al. 2004]. Similarly, ur Réhman et al. tracked the feet using a mobile phone using template matching [ur Réhman et al. 2012]. The *Visual Keyboard* used a vision-based approach to extract users' feet in order to play a musical keyboard [Jean and Albu 2008]. Vision methods have also been used to activate virtual pedals [Shaukat et al. 2010] [Yousaf and Habib 2012], predict driver behaviour [Tran et al. 2012] and control a first-person game [Xavier et al. 2011].

Commercial **depth cameras** such as the Microsoft Kinect and the Asus Xtion made it easier to track the feet accurately in three dimensions. These cameras are usually cheap and fairly accurate, but they also require direct line of sight with the user. Han et al. used this approach to investigate kick gestures for mobile interaction [Han et al. 2011]. At the time of writing, the available SDK of these systems is only able to track legs and feet when the users' whole body is in the field of view. Some works aimed at extending this functionality to be able to track the feet when the rest of the body is not visible. Hu et al. proposed a method to accurately extract a 3D skeleton of user's legs and feet with a Kinect mounted on a walker for the elderly (a.k.a. a *Zimmer* frame), but it does not run in real time [Hu et al. 2011]. *Bootstrapper* recognizes users around a multitouch table by looking at their feet using Kinect sensors mounted on the table edges facing down [Richter et al. 2012]. Simeone et al. implemented a foot tracker with a Kinect sensor mounted under a desk and used it to support 3D interaction tasks [Simeone et al. 2014]. The same tracking approach has been used to characterise foot movement performance [Velloso et al. 2015a] and to enable foot-based interaction with games [Velloso et al. 2015b] Another similar approach is to use a **laser range finder**. Huber et al. used such system to estimate spatial interest at public displays [Huber 2013].

As the feet are most of the time in contact with the floor, feet tracking lends itself to using augmented floors, which can be implemented with a variety of sensors. The first few prototypes of interactive floors were built for dance performances: *Magic Carpet* used a grid of **piezoelectric wires** [Paradiso et al. 1997], *LiteFoot* used a matrix of **optical proximity sensors** [Fernström and Griffith 1998] and *Z-Tiles* used a modular architecture of hexagonal pressure-sensitive tiles [McElligott et al. 2002][Richardson et al. 2004]. Lopes et al. used a Dynamic Time Warping algorithm to classify foot gestures on a wooden board from **audio** data [Lopes et al. 2010]. This approach is simple to deploy, but can only detect gestures rather than positions or orientations and may suffer from interference from other sources of noise. Other approaches for augmenting floors include **pressure sensitive** [Sangsuriyachot et al. 2011; Orr and Abowd 2000] and **capacitive** floors [Jalaliniya et al. 2013].

Camera-based floors sense users' feet positions with computer vision techniques. *iGameFloor* used four webcams to track users from under a semitransparent floor [Grønbaek et al. 2007]. *Multitoe* is a high-resolution **Frustrated Total Internal Reflection** (FTIR) back-projected floor that allows for precise touch input [Augsten et al. 2010]. *GravitySpace* used the same technology to reconstruct users' poses in 3D above the floor from pressure imprints [Bränzel et al. 2013]. *Kickables*, in turn, used Multitoe to track tangibles that users manipulate with their feet [Schmidt et al. 2014]. Whereas these approaches are highly accurate and provide output on the same surface, they do not scale very well and are difficult to deploy, as they require a lot of changes in the infrastructure. An alternative would be to track users from above, such as in *iFloor*, but at the price of losing tracking accuracy [Krogh et al. 2007]. A variety of companies sell top-projected interactive floors, including *EyeClick*, *Luminvision* and *GestureTek*

and such installations have been deployed in shopping malls and other public spaces all around the world.

The feet have also been used to interact with vertical surfaces. Jota et al. implemented interaction techniques for interacting with the bottom part of vertical displays, where the hands would not be able to typically reach [Jota et al. 2014].

Because augmented environments and surfaces are often able to extract the position and orientation of the whole foot in two or three dimensions, systems can use this information in different ways: as a blob, as a hotspot or as relative motion. A **blob** is a set of points that pertain to the foot. When in three dimensions, this is often called a point cloud. For example, FTIR-enabled floors see a 2D blob, whereas depth cameras see 3D point clouds. Using the feet as blobs effectively increases the size of the target, because any part of the foot can activate it. Due to the relatively large size of the feet, this is more prone to accidental activation, so targets should be large and well spread apart. Examples of works that track the feet as blobs include Paelke et al. and ur Réhman et al. [Paelke et al. 2004] [ur Réhman et al. 2012].

Instead of using the whole blob, it is also possible to reduce it to a single or multiple **hotspots**. This allows for more precision in the interaction. For example, Simeone et al. [Simeone et al. 2014] convert a point cloud to two points in 3D representing the tip of the foot and the ankle and Augsten et al. [Augsten et al. 2010] convert it to a single point in 2D. Augsten et al. also investigated which positions users find intuitive for this hotspot. Their results indicate that there is no universal position agreed by all users, so in their system they implemented a calibration procedure that allows users to customise the position of the hotspot.

The final approach is to ignore the absolute position and orientation of the feet and only take into account their **relative movement**. This is often used for gesture recognition, such as in Lopes et al. [Lopes et al. 2010].

4.2. Output and Feedback

In order to close the interaction loop, interactive systems must provide some kind of feedback or output. Types of output in foot-operated interactive systems include visual, auditory, haptic and thermal feedback.

Visual feedback is the primary feedback modality for traditional computing systems, so it is of no surprise that a wide variety of foot-operated systems provide some kind of visual feedback. An important issue for visual feedback is the distinction between *direct* and *indirect* input devices. Direct input devices (e.g. a touch-enabled screen) have “a unified input and display surface”, whereas indirect devices (e.g. the mouse) do not “provide input on the same physical space as the output” [Hinckley and Wigdor 2002].

Direct input can be implemented by using touch sensitive floor displays, such as Multioe [Augsten et al. 2010] or by overlaying the interface with the foot, either through Augmented Reality [Paelke et al. 2004] or by projecting the interface on the floor [McFarlane and Wilder 2009]. This presents a challenge because the feet significantly occludes the screen. Moreover, in order to visualise the output, the user must look down, which can be tiring after extended periods of time. In indirect input, the feet and the display are separate. This creates the need for some representation of the feet on the screen, such as a cursor or other parameter that the feet are controlling. Because the input and output devices are separated, special attention must be paid to the mapping between the two, as incompatible mappings may be cumbersome for the user [Chan and Chan 2009]. Saunders and Vogel investigated indirect interaction with taps and kicks while standing with and without visual feedback [Saunders and Vogel 2015].

Audio feedback is usually implemented in mobile systems, in order to reduce the cognitive visual overload. Because of the natural rhythmic pattern of our gait, several

systems used input from the feet to modulate music, especially tempo, when the user is walking or jogging [Moens et al. 2010], [Bieber and Diener 2005]. Another application area in which the feet are used to generate audio output is in artistic performances, by mapping dancers' [Paradiso and Hu 1997] and musicians' [Papetti et al. 2011] foot movements to music parameters. Stienstra et al. explored how auditory feedback can improve speed skaters' performance by sonifying the data captured from force and acceleration sensors on the skates [Stienstra et al. 2011].

Haptic feedback consists of forces or vibrations applied on the users' skin to stimulate their sense of touch. This has been implemented in a wide variety of augmented shoes in the form of **vibration motors** [Watanabe et al. 2005], [Matthies et al. 2013]. Rovers and van Essen presented an investigation and design guidelines for using haptic feedback at different points on the foot sole [Rovers and Van Essen 2005], [Rovers and Van Essen 2006]. These authors' findings suggest that users understand better vibration patterns in the longitudinal direction than in the transversal direction; users recognise static patterns in the transversal direction, but are confused by moving patterns; and recognising more complex patterns such as a "zigzag" pattern is difficult. *CabBoots* [Frey 2007] provides **height/tilt actuation** to help the user to navigate through an environments by using actuators inside the boots to create an angulation on the shoe sole and hence steer the user in the correct direction. A commercial example of mechanical actuation inside the shoe are the *Adidas 1* (2005) trainers, which contained a motor in the middle of the sole that changed the compression characteristics of the heel pad. The *Vectrasense Raven Thinkshoe* (2004) did something similar but with an air bladder in the sole. One commercial example of haptic feedback on the feet for navigation is the *Lechal Shoe*, which vibrates to guide the user on the path he set on his smartphone.

Thermal feedback can be produced by Peltier elements, which create a temperature differential on each of its sides. Matthies et al. included one in an insole and suggested that a rising temperature could be used to make the user unconsciously uncomfortable in situations such as to indicate the player is wounded or bleeding in a game or feedback on how many missed calls or unread messages the user has received [Matthies et al. 2013]. They stress, however, that the human body tends to acclimate to thermal discomfort, becoming less responsive to a constant stimulus. The authors suggest alternating between hot and cold to maintain the sensory response.

5. FOOT-BASED INTERACTIONS

So far, we have analysed previous work in terms of users and systems, relating how different body poses and movements impact the design of systems that capture input from the feet and provide some kind of output. In this section, we deal with the dialogue between users and systems. More specifically, we are concerned with the different actions users perform with their feet for interaction.

Karam and schraefel defined a taxonomy for hand gestures in HCI [Karam and schraefel 2005] and proposed five categories for gesture styles: *deictic* (gestures involving pointing), *manipulative* ("whose intended purpose is to control some entity by applying a tight relationship between the actual movements of the gesturing hand/arm with the entity being manipulated" [Quek et al. 2002]), *semaphoric* ("any gesturing system that employs a stylized dictionary of static or dynamic (...) gestures" [Quek et al. 2002]), *gesticulation* (gestures that accompany speech) and *language gestures* (such as sign language).

We distinguish four categories of feet actions in HCI: *semaphoric* (Section 5.1), *deictic* (Section 5.2), *manipulative* (Section 5.2) and *implicit* (Section 5.3). We use the same definitions as Karam and schraefel for semaphoric, deictic and manipulative.

Implicit actions comprise the nonverbal behaviour of the legs and feet as well as non-communicative actions, such as walking.

5.1. Semaphoric

Semaphoric actions are specific gestures belonging to a dictionary. We compiled a comprehensive list of gestures explored in the literature in Table V. In Section 3.2 we showed how gestures derive from the degrees of freedom of the lower limbs. In this section we look at how these movements and their combinations are used in interactive systems. An important distinction within this category is that as well as discrete information (i.e. *which* gesture was performed), semaphoric gestures can also carry continuous information (i.e. *how* the gesture was performed). For example, a kick gesture can be used as a simple iconic trigger for a command (e.g. in a music player, a kick advances the playlist to the next song [Alexander et al. 2012]), but the system can also use its direction and speed as parameters for the command (e.g. determining where a football goes in a foot-controlled game [Han et al. 2011], [Paelke et al. 2004]).

Touch-sensitive surfaces, inertial motion sensors and depth cameras made multi-touch and mid-air gestures a reality for consumers [Saffer 2008]. By adapting these technologies for the feet—e.g. multitouch floors [Augsten et al. 2010], IMUs on the feet [Han et al. 2011] and depth cameras under the desk [Simeone et al. 2014]—researchers have been incrementing the feet gesture vocabulary as well as understanding what are the appropriate mappings between gesture and functionality.

In a guessability study, Alexander et al. investigated users' intuitive mappings between feet gestures and controls for mobile devices, compiling a gesture set with corresponding mappings phone and media control as well as map and browser navigation [Alexander et al. 2012]. They identified two large sets of gestures: discrete and continuous. Furthermore, the authors compared four techniques for implementing continuous mappings for panning actions: displacement-based, rate-based hold, rate-based continuous and flick. Similarly to Kim and Baber's findings for pedal operation [Kim and Kaber 2009], Alexander et al. found that users tend to prefer rate-based approaches.




Table V shows the gestures that emerged from our literature review. **Toe tapping** is the most common gesture across papers [Chan et al. 2010], [Crossan et al. 2010][Papetti et al. 2011], [Augsten et al. 2010], [LaViola Jr et al. 2001], [Scott et al. 2010]. We attribute its popularity to its low effort, to its historical operation in pedals and to it being analogous to a finger touch. A variation is the **heel tap** [LaViola Jr et al. 2001], [Scott et al. 2010]. The disadvantage of the heel tap is that it requires users to lift the weight of the leg if sitting or the whole body if standing, which can be demanding on the calf muscle. These gestures are often mapped to selecting an option or activating a certain functionality.

In **toe and heel rotation**, the user pivots the foot with an abduction or adduction movement at the ankle. When performing this action, the foot remains anchored at the heel or toe, so it is usually more comfortable than the **swipe**, which involves moving the whole foot in a certain direction, requiring some leg effort [Velloso et al. 2015a] [Scott et al. 2010].

Toe and heel clicking gestures require users to use both feet at the same time. Clicking the heels in Western culture is often associated to film "The Wizard of Oz" (1939), in which Dorothy, the main character, clicks her heels to go back home. For this reason, heel clicking has been used to invoke the system (the interface's home) in [LaViola Jr et al. 2001].

Shaking the foot involves an irregular movement across multiple movement axes. The dismissive semantics associated with the gesture led participants in Alexander et al.'s study to map it to ignore an incoming call [Alexander et al. 2012]. Because it is an easy gesture, with a very distinctive pattern—unlike tapping, for example, which can

Table V: Dictionary of Semaphoric Feet Gestures

Gesture	Name	Description	Example
	Toe Tap	User raises and lowers the toes	[Crossan et al. 2010]
	Heel Tap	User raises and lowers the heel	[Tao et al. 2012]
	Toe Rotation	User pivots the foot around the toes	[Scott et al. 2010]
	Heel Rotation	User pivots the foot around the heel	[Scott et al. 2010]
	Toe Click	User touches both toes together	[LaViola Jr et al. 2001]
	Heel Click	User touches both heels together	[LaViola Jr et al. 2001]
	Swipe	User slides the foot in a certain direction	[LaViola Jr et al. 2001]
	Shake	User moves the foot with short, quick, irregular vibratory movements	[LaViola Jr et al. 2001]
	Shape Trace	User draws the outline of a shape with the toes	[Alexander et al. 2012]
	Kick	Vigorous movement of the foot in a certain direction	[Han et al. 2011]
	Step	User puts one foot in front of the other as if walking	[Drossis et al. 2013]

be mistaken with natural walking—it can be used as a *Whack Gesture*, i.e. inexact and inattentive interaction techniques that require minimum cognitive processing from the user [Hudson et al. 2010].

As immortalised by Daniel Day-Lewis’s performance of the real story of Irish painter Christy Brown in *My Left Foot* (1989), some people are able to paint with their feet. Whereas this may sound incredibly hard for most users, it is still possible for them to **trace basic shapes** with their feet. In Alexander et al.’s study, the shape being traced was a circle, but it would also be possible to devise interaction techniques that use other shapes, such as a square or a triangle.

A foot gesture that has been particularly well studied is the **kick**. Han et al. investigated how well users can control the direction and velocity of their kicks in selecting radial targets [Han et al. 2011]. The authors recommend using at most 5 targets with an angular width of 24°. In [Jota et al. 2014], kicks are used to transfer objects on a vertical screen between the foot-operated area and the hand-operated area. Schmidt et al. proposed tangibles for feet that users push and kick across a large interaction surface [Schmidt et al. 2014].

Stepping is the basic unit of the *Walking-in-place* (WIP) interaction technique [Slater et al. 1995]. The technique is commonly used for walking around virtual environments, as the proprioceptive information from the body movements makes the user feel more immersed in it. This technique has been used extensively in the Virtual Reality (VR) community and implemented in a wide variety of ways, including sensing in the head-mounted display [Slater et al. 1995], the Wii Balance Board [Williams et al. 2011] and the Kinect depth camera [Zheng et al. 2012]. Because this technique is often used for VR locomotion, controlling speed and direction is critical. Among the solutions for smoothing the speed are the *Gait-Understanding-Driven* (GUD-WIP) [Wendt et al. 2010], *Low-Latency, Continuous Motion* (LLCM-WIP) [Feasel et al. 2008], and *Speed-Amplitude-Supporting* (SAS-WIP) [Bruno et al. 2013] walking-in-place techniques. Whereas WIP techniques are able to set the movement speed, other modalities are still required for setting the direction, including the head, the torso, hand gestures, or other devices such as wands and gamepads [Slater et al. 1995], [Templeman et al. 1999]. For a complete treatment of interaction techniques for walking in virtual environments, see Steinicke et al. [Steinicke et al. 2013].

The gestures described so far sprung mostly from research prototypes, but are starting to appear in commercial products. For example, the *Lechal* footwear line uses foot gestures to tag locations, set destinations, control navigation.

5.2. Deictic & Manipulative

Deictic actions are commonly understood as pointing gestures. When we use our foot to tap on a target on an augmented floor [Augsten et al. 2010] or move a trackball over a target on a GUI [Pakkanen and Raisamo 2004], we are using deictic actions. Manipulative actions map elements of the physical configuration of the foot, such as position or orientation to properties of system objects. When we drag a foot to rotate a virtual cube [Simeone et al. 2014], push a tangible object across the floor [Schmidt et al. 2014] or move a foot mouse to control the orientation of a scene camera [Balakrishnan et al. 1999], we are using manipulative actions. As both types of action involves getting the foot from an original configuration to a target configuration, although for different purposes, we examine them together. More specifically, in this section we review the literature on the movement times, accuracy, reaction times and learning effects of such actions.

5.2.1. Movement Times and Accuracy. The most widely adopted model of human movement is Fitts’s Law, which was originally developed to predict movement times for

hand pointing, but has been proved applicable in a wide variety of situations [Fitts 1954]. Its most common form is the Shannon formulation, proposed by MacKenzie [MacKenzie 1992], where MT is the time in seconds to reach the target, D is the distance to the target and W is the width of the target:

$$MT = a + b \times \log_2 \left(\frac{D}{W} + 1 \right) \quad (1)$$

Early work on measuring movement times for the feet was concerned with pedal operation—for a review, see Kroemer [Kroemer 1971]. In this context, Drury applied Fitts’s Law to find optimal pedal positions [Drury 1975]. He proposed a variation of Fitts’s Law that takes into account the width of the user’s shoe (S):

$$MT = a + b \times \log_2 \left(\frac{D}{W + S} + \frac{1}{2} \right) \quad (2)$$

This modification is due to the fact that Drury considered a target hit whenever any part of the participant’s shoe touched it, effectively increasing the size of the target. Hoffman argued that ballistic and visually controlled foot movements should be modelled differently [Hoffmann 1991]. He proposed that while Fitts’s law provides a good fit for visually controlled movements, ballistic movements are better modelled by the square root of the distance:

$$MT = a + b \times \sqrt{D} \quad (3)$$

Despite being originally created to model movement times, Fitts’s Law can also be adapted to incorporate accuracy measurements. If end-point scatter data is available, this can be accomplished by using the effective distance (D_e) and effective width (W_e), where D_e is the mean movement distance from the start position to the end points and W_e is 4.133 times the standard deviation of the end points:

$$MT = a + b \times \log_2 \left(\frac{D_e}{W_e} + 1 \right) \quad (4)$$

Velloso et al. derived one-dimensional and two-dimensional performance models for foot pointing tasks in a seated position that take into account this effective index of difficulty [Velloso et al. 2015a].

Research so far has found little influence of foot dominance on movement times and accuracy. Chan et al. conducted a study in which they found no effect of gender of foot dominance on movement times in a reciprocal tapping task whilst seated [Chan et al. 2010]. Velloso et al. also found no effect of foot dominance on foot pointing with unconstrained foot movements, but found that sideways movements are faster and easier than forward and backward ones [Velloso et al. 2015a].

We summarise pointing performance results for different input devices in Table VI.

5.2.2. Reaction Times. Reaction time is the time elapsed between the presentation of a sensory stimulus and the corresponding behavioural response. A common model for reaction times is the Hick-Hyman law [Hick 1952] [Hyman 1953], which predicts that the reaction time for a set of n stimuli, associated with one-to-one responses is:

$$MT = a + b \times \log_2 (n) \quad (5)$$

Simonen et al. compared reaction times of dominant hands and feet and found that reaction times were nearly the same in choice reaction time testing and the hand was

Table VI: Performance Comparisons between Hand and Feet. Values correspond to ratios of task completion times and error rates for the feet versus the hands.

Reference	Foot Device	Hand Device	Participants	$\frac{\text{Foot Time}}{\text{Hand Time}}$	$\frac{\text{Foot Error}}{\text{Hand Error}}$
[Hoffmann 1991]	None	None	10	1.95 ¹	
[Hoffmann 1991]	None	None	10	1.7 ²	
[Springer et al. 1996]	Joystick	Mouse	17	2.32	1.56
[Pakkanen et al. 2004]	Trackball	Trackball	9	1.6	1.2
[Dearman et al. 2010]	Pedals	Tilt	24	1.05 ³	1.20 ³
[Dearman et al. 2010]	Pedals	Touch	24	0.98 ³	1.87 ³
[Garcia and Vu 2011]	Joystick	Trackball	16	1.58 ⁴	

Notes: ¹: Ratio between the reported coefficients of the indices of difficulty for *visually controlled* movements.

²: Reported ratio for *ballistic* movements

³: Ratio between reported means for selection time and error rate in the text formatting task.

⁴: Mean ratio between reported task completion times for the foot joystick and the mouse.

slightly faster (125ms) than the foot in simple reaction time testing [Simonen et al. 1995]. Reaction times are also dependent on the spatial mapping between foot controls and visual stimuli [Chan and Chan 2009].

5.2.3. Learning Effects. An often overlooked issue in foot interaction studies is the learning effect. Since most users seldom use their feet for computing tasks, a significant amount of the performance gap between hands and feet could be explained by the lack of practice. In a study comparing the learning effects of a foot mouse and a hand trackball over ten sessions, Garcia and Vu found that while participants quickly reached a performance ceiling with the trackball, practice with the foot mouse significantly improved performance [Garcia and Vu 2009; 2011].

These results indicate that the feet suffer an unfair advantage in studies comparing hand- and foot-operated interfaces without allowing enough time for practice. In an early evaluation of pointing devices, in a time when users unfamiliar with a hand mouse still existed, a knee control fared comparably to the mouse, outperforming other hand interfaces [English et al. 1967].

5.3. Implicit

Regardless of how the feet are tracked the input can be used for explicit or implicit interaction. Schmidt distinguishes explicit from implicit interaction in that whereas in explicit interaction, “the user tells the computer in a certain level of abstraction (. . .) what she expects the computer to do”, in implicit interaction, systems understand as input actions performed by the user that are not primarily aimed at interacting with a computerised system [Schmidt 2000].

In Section 3.5 we showed that our lower limbs send nonverbal signals without our conscious knowledge. Analogously, several systems extract information from foot behaviour without us explicitly using this behaviour for interaction.

On an individual scale, several smart shoes implement this kind of interaction. By monitoring users from within the shoes, these systems are able to infer the user’s iden-

tity [Huang et al. 2006], gait abnormalities [Kong and Tomizuka 2009] and monitor diseases such as diabetes [Morley Jr et al. 2001].

On a public scale, augmented environments and surfaces are able to infer information about users unobtrusively by monitoring their feet posture. GravitySpace uses an FTIR-enabled floor to distinguish users, recognise poses and detect objects [Bränzel et al. 2013]. Bootstrapper recognises users by their shoes to personalise the usage of a multitouch table [Richter et al. 2012]. Smart Floor recognises users from their footstep profile [Orr and Abowd 2000].

Some works draw from Hall’s theory of Proxemics [Hall 1966] to make inferences about user’s attention in regards to public displays. With laser range finders, Huber was able to distinguish users who were seeking information on a public display from those who were not solely based on their foot patterns [Huber 2013]. Quek et al. also found high correlation between gaze orientation and feet position [Quek et al. 2008]. Considering that tracking the feet is arguably less invasive than the face or eyes, such approaches offer an interesting way to build context-aware public displays.

5.4. Multi-Modality

The feet serve one of two purposes in explicit interaction: as the main control of an application (primary) or as supporting other interfaces in the interaction (secondary). Typically, the feet are used as the primary modality for input when the user’s hands are busy or dirty (e.g. [Alexander et al. 2012]), the user has a disability or other accessibility issue that prevents him from using his hands (e.g. [Springer and Siebes 1996]) or it is awkward to reach the interface with the hands (e.g. [Jota et al. 2014]).

Most commonly, the feet are used to support the task being carried out by the hands. Previous research has explored combinations of the feet with several different modalities including a keyboard [Garcia and Vu 2011], a multi-touch table [Sangsuriyachot et al. 2011], gaze [Göbel et al. 2013], tangible interfaces [Balakrishnan et al. 1999; Schmidt et al. 2014], large displays [Daiber et al. 2009], a mouse [Simeone et al. 2014] and a CAVE [LaViola Jr et al. 2001]. Typical secondary tasks assigned to the feet include acting as a modifier (e.g. guitar effects pedals, transcription pedals, foot switches as hotkeys), manipulation support (e.g. camera control in 3D environments [Balakrishnan et al. 1999]) and mode selection (e.g. mode selection in a text editor [Sellen et al. 1992] and in a musical keyboard [Mohamed and Fels 2002]).

6. DISCUSSION AND FUTURE DIRECTIONS

As basis for our discussion, we use the categories previously assigned to the surveyed works as a framework for analysing the design space of foot-based interaction and provide directions for future work. Table VII how the works described in the previous sections populate this design space.

The first thing that is immediately noticeable in Table VII is that the cell with the highest number of works is that of Sitting, Mediated, Deictic & Manipulative interaction. These works mostly study foot-operated computer peripherals for the desktop setting. Given that this is the most traditional HCI setting, the high popularity of this kind of work is understandable. However, few works look at long-term deployments of these interfaces, so more research needs to be done on the effects of practice on user pointing performance.

On the other hand, we also notice some empty cells (omitted from the table for space purposes). We found no works that investigate implicit interaction with mediated sensing, in any pose. Works that use mediated sensing to analyse human behaviour typically aim at understanding usage patterns or emotions, for example, by looking at the trajectory of the mouse [Yamauchi 2013] or how users press the buttons on a gamepad [Sykes and Brown 2003]. Therefore, we attribute the lack of studies of implicit user

behaviour when interacting with foot-operated devices to the limited number of use cases for such input devices and the small populations to which they are targeted.

Similarly, even though there are plenty of works that look at implicit interaction with intrinsic sensing when walking and running, we found no such works explicitly aimed at sitting and standing users. This is explained by the fact that the parameter usually being monitored by such smart shoes is the user's gait cycle. Possible directions for future research along these lines include using smart shoes to infer user states from their natural foot behaviour at their desks or even to infer conversation dynamics from interpersonal communication when standing upright.

From the table, we also notice that different poses lend themselves well to certain types of interaction. In the Sitting pose, Aside from Mediated, Deictic & Manipulative interactions, we also notice a large number of works investigating Extrinsic, Deictic & Manipulative interactions, evidencing a popularity of works investigating explicit control of desktop computers. In the Standing pose, we see a concentration of works using Extrinsic sensing. This shows that sensing the feet from the outside is well suited to applications in which the user interacts with a fixed installation, such as public displays or interactive floors. In the Walking & Running pose, we see a large number of works exploring Implicit interaction, evidencing that gait monitoring is a topic that has been explored in depth.

Based on the analysis of the papers reported in this survey, we achieved some insights, summarised in the following:

Feet excel at performing simple tasks. Feet lend themselves to performing simple tasks, such as operating a car's brakes. Yet, these tasks are as important as the tasks simultaneously performed by the user's hands. Several works in the literature mention that the feet are suitable for tasks where the precision of positioning is not of primary importance [Pakkanen and Raisamo 2004], but the feet are also capable of accomplishing highly complex tasks, such as playing the organ's baseline and manipulating three dimensional virtual objects [Simeone et al. 2014]. However this requires a substantial amount of practice. The very few occurrences of such use cases suggest that hands—if they are not busy—are preferred for complex tasks.

Feet interfaces can assist the hands, rather than replacing them. Traditionally, foot-based input was only successful in cases where hand-based input was not a viable option, either because the hands were already busy with other controls or because they were not available for other reasons (e.g. carrying objects, being dirty, etc.) [Alexander et al. 2012]. This is arguably due to the feet being less dexterous, incapable of grasping objects the way our hands do, and being busy with locomotion. Therefore, it is not surprising that, for example, we are not using foot mice, but pedals are more widely adopted, such as in gaming or transcription. Nevertheless, a lot of research has been put into comparing the hands and the feet, leading to results where the hands consistently outperform the feet. Few works, however, explore how they can be used concurrently. We believe that the feet can effectively complement the hands, offering additional input channels with no homing time.

The performance of the feet might not be as bad as people think. Several works explored the possibility of reassigning cursor control from the hands to the feet, but in these experiments, the mouse consistently outperformed all foot interfaces (Table VI). Garcia and Vu's results, however, suggest that this may not be because the feet are inherently bad for this purpose, but rather, because of lack of training [Garcia and Vu 2011]. Future work must take these learning effects into account, allowing users to become sufficiently familiar with the input device for a fair comparison with hand interfaces.

Foot-based input lends itself well to wearable computing. Wearable computing and augmented reality applications will benefit from foot-based input: users are

Table VII: Examples of instances of the design space of foot-based interactions

Pose	Sensing	Interaction	Examples
Sitting	Mediated	Semaphoric	[Sellen et al. 1992]
		Deictic & Manipulative	[Pakkanen and Raisamo 2004], [Springer and Siebes 1996][Balakrishnan et al. 1999], [Chan and Chan 2009], [Dearman et al. 2010], [English et al. 1967], [Garcia and Vu 2011], [Göbel et al. 2013], [Kim and Kaber 2009], [Pearson and Weiser 1986], [Pearson and Weiser 1988a], [Pearson and Weiser 1988b], [Xavier et al. 2011], [Zhong et al. 2011]
	Intrinsic	Semaphoric	[Papetti et al. 2011], [Tao et al. 2012]
		Deictic & Manipulative	[Xavier et al. 2011], [Ye et al. 2005]
	Extrinsic	Semaphoric	[Simeone et al. 2014]
		Deictic & Manipulative	[Chan et al. 2010], [Jean and Albu 2008], [Shaukat et al. 2010], [Xavier et al. 2011], [Simeone et al. 2014],[Velloso et al. 2015a]
Implicit		[Bränzel et al. 2013], [Tran et al. 2012]	
Standing	Mediated	Semaphoric	[Scott et al. 2010]
		Deictic & Manipulative	[Daiber et al. 2009], [Schöning et al. 2009]
	Intrinsic	Semaphoric	[Alexander et al. 2012], [LaViola Jr et al. 2001], [Crossan et al. 2010]
		Deictic & Manipulative	[Choi and Ricci 1997], [Higuchi and Nojima 2010]
	Extrinsic	Semaphoric	[Augsten et al. 2010], [Drossis et al. 2013], [Jalaliniya et al. 2013], [Jota et al. 2014], [Lopes et al. 2010], [Sangsuriyachot et al. 2011]
		Deictic & Manipulative	[Augsten et al. 2010], [Grønbaek et al. 2007], [Paelke et al. 2004], [ur Réhman et al. 2012],[Saunders and Vogel 2015]
Implicit		[Bränzel et al. 2013], [Huber 2013], [Quek et al. 2008], [Richter et al. 2012]	
Walking & Running	Mediated	Deictic & Manipulative	[Templeman et al. 1999] [Iwata et al. 2001] [Darken et al. 1997]
	Intrinsic	Semaphoric	[Yamamoto et al. 2008]
		Deictic & Manipulative	[Choi and Ricci 1997], [Paradiso et al. 2000]
		Implicit	[Frey 2007], [Gafurov et al. 2011], [Hockman et al. 2009], [Huang et al. 2006], [Lécuyer et al. 2011], [Moens et al. 2010], [Morley Jr et al. 2001]
	Extrinsic	Semaphoric	[Han et al. 2011]
		Implicit	[Bränzel et al. 2013], [Hu et al. 2011], [Orr and Abowd 2000], [Watanabe et al. 2005]

on the go and interact spontaneously, with their hands often busy with other tasks (Section 4.1.2). At the same time, new sensing technology allows for capturing foot interaction with higher fidelity, allowing for both explicit and implicit interaction.

We still lack the understanding of how these interfaces work in the real world. Whereas there is a significant body of work on laboratory studies of foot-based interfaces, we still need to understand how these interfaces work when deployed for extended periods of time. Not only such *in-the-wild* studies could give us a better understanding of learning effects, it could provide insights on user acceptance of such interfaces.

Interactive systems can further benefit from what the feet tell about users' internal states. Even though the majority of the work in HCI that explores foot interfaces look into explicit interaction, by monitoring the feet, it is possible to recognise not only the activity in which the user engaged, but also internal states, such as attention, relaxation and anxiety (Sections 3.5 and 5.3).

7. CONCLUSION

In this survey we analysed foot interaction from the perspectives of the user, the systems and the interaction between users and systems. From the user perspective, we described the anatomy of the lower limbs and how it evolved. We then broke down the movements for each joint and related them to corresponding interaction techniques. We analysed the different poses in which users interact with foot interfaces — sitting, standing and walking/running — and how these poses influence the interaction. We then discussed how internal states are reflected by the behaviour of the lower limbs.

From the system perspective, we analysed how systems can use the feet to capture input and provide feedback to the user. We classified foot-operated sensing as mediated, intrinsic and extrinsic. We described actual implementations of such devices in the research literature and in commercial applications. We then discussed the different ways that such systems output information to the user.

Finally, from the interaction perspective, we categorised the foot actions into semaphoric, deictic, manipulative, implicit. We compiled a dictionary of foot semaphoric gestures, aggregated foot performance results from previous work and described applications that infer internal states and activities from the posture and movement of the lower limbs. We then discussed applications that use the feet in combination with other input modalities.

Foot-based input substantially shaped the design of many devices and systems that matter to us and that we interact with on a daily basis, from cars to musical instruments. Whereas mechanical systems have employed foot controls for a long time, electronic devices are seldom designed to benefit from this modality. We believe that by better understanding the role of the feet in HCI, we can better design interfaces that take input from our whole body.

REFERENCES

- Jason Alexander, Teng Han, William Judd, Pourang Irani, and Sriram Subramanian. 2012. Putting your Best Foot Forward: Investigating Real-world Mappings for Foot-based Gestures. In *Proceedings of the 2012 ACM annual conference on Human Factors in Computing Systems (CHI '12)*. ACM Press, New York, New York, USA, 1229.
- Michael Argyle. 1988. *Bodily communication*. Routledge, New York, NY.
- Thomas Augsten, Konstantin Kaefler, René Meusel, Caroline Fetzer, Dorian Kanitz, Thomas Stoff, Torsten Becker, Christian Holz, and Patrick Baudisch. 2010. Multitoe: high-precision interaction with back-projected floors based on high-resolution multi-touch input. In *Proceedings of the 23rd annual ACM symposium on User interface software and technology (UIST'10)*. ACM, 209–218.

- Ravin Balakrishnan, George Fitzmaurice, Gordon Kurtenbach, Karan Singh, and King Street East. 1999. Exploring interactive curve and surface manipulation using a bend and twist sensitive input strip. In *Proceedings of the 1999 Symposium on Interactive 3D graphics*. ACM, 111–118.
- Ralph M Barnes, Henry Hardaway, and Odif Podolsky. 1942. Which pedal is best. *Factory Management and Maintenance* 100 (1942), 98–99.
- Ralph L Barnett. 2009. Foot controls: Riding the pedal. *The Ergonomics Open Journal* 2 (2009), 13–16.
- Steffi Beckhaus, Kristopher J Blom, and Matthias Haringer. 2005a. Intuitive, hands-free travel interfaces for virtual environments. In *New Directions in 3D User Interfaces Workshop of IEEE VR*. 57–60.
- Steffi Beckhaus, Kristopher J Blom, and Matthias Haringer. 2005b. A new gaming device and interaction method for a First-Person-Shooter. *Proceedings of the Computer Science and Magic 2005* (2005).
- Steffi Beckhaus, Kristopher J Blom, and Matthias Haringer. 2007. ChairIO—the chair-based Interface. *Concepts and technologies for pervasive games: a reader for pervasive gaming research* 1 (2007), 231–264.
- Eric Bergman and Earl Johnson. 1995. Towards accessible human-computer interaction. *Advances in human-computer interaction* 5, 1 (1995), 87–114.
- Gerald Bieber and Holger Diener. 2005. Stepman-a new kind of music interaction. In *Proceedings of the International Conference on Human-Computer Interaction (HCI International)*.
- Mark Billinghamurst and Bill Buxton. 2011. Gesture based interaction. *Human Input to Computer Systems: Theories, Techniques and Technology* 24 (2011).
- Alan Bränzel, Christian Holz, Daniel Hoffmann, Dominik Schmidt, Marius Knaust, Patrick Lühne, René Meusel, Stephan Richter, and Patrick Baudisch. 2013. GravitySpace: tracking users and their poses in a smart room using a pressure-sensing floor. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, ACM Press, New York, New York, USA, 725–734.
- David C Brogan, Ronald A Metoyer, and Jessica K Hodgins. 1998. Dynamically simulated characters in virtual environments. *Computer Graphics and Applications, IEEE* 18, 5 (1998), 58–69.
- Luís Bruno, João Pereira, and Joaquim Jorge. 2013. A new approach to walking in place. In *Human-Computer Interaction—INTERACT 2013*. Springer, 370–387.
- Giovanni Buccino, Lucia Riggio, Giorgia Melli, Ferdinand Binkofski, Vittorio Gallese, and Giacomo Rizzolatti. 2005. Listening to action-related sentences modulates the activity of the motor system: a combined TMS and behavioral study. *Cognitive Brain Research* 24, 3 (2005), 355–363.
- Maria Chiara Carrozza, Alessandro Persichetti, Cecilia Laschi, Fabrizio Vecchi, Roberto Lazzarini, Pierpaolo Vacalebri, and Paolo Dario. 2007. A Wearable Biomechatronic Interface for Controlling Robots with Voluntary Foot Movements. *Mechatronics, IEEE/ASME Transactions on* 12, 1 (2007), 1–11.
- Angel O K Chan, Alan H S Chan, Annie W Y Ng, and B L Luk. 2010. A Preliminary Analysis of Movement Times and Subjective Evaluations for a Visually-Controlled Foot-Tapping Task on Touch Pad Device. In *Proceedings of the International MultiConference of Engineers and Computer Scientists*, Vol. 3. 17–19.
- Ken W.L. L Chan and Alan H.S. S Chan. 2009. Spatial stimulus–response (SR) compatibility for foot controls with visual displays. *International Journal of Industrial Ergonomics* 39, 2 (March 2009), 396–402.
- Tanya L Chartrand and John A Bargh. 1999. The chameleon effect: The perception–behavior link and social interaction. *Journal of personality and social psychology* 76, 6 (1999), 893.
- Meng Chen, Bufu Huang, and Yangsheng Xu. 2008. Intelligent shoes for abnormal gait detection. In *Robotics and Automation, 2008. ICRA 2008. IEEE International Conference on*. IEEE, 2019–2024.
- Insook Choi and Carlos Ricci. 1997. Foot-mounted gesture detection and its application in virtual environments. In *Systems, Man, and Cybernetics, 1997. Computational Cybernetics and Simulation., 1997 IEEE International Conference on*, Vol. 5. IEEE, 4248–4253.
- Andrew Crossan, Stephen Brewster, and Alexander Ng. 2010. Foot tapping for mobile interaction. In *Proceedings of the 24th BCS Interaction Specialist Group Conference (BCS '10)*. British Computer Society, Swinton, UK, UK, 418–422.
- Florian Daiber, J Schöning, and A Krüger. 2009. Whole Body Interaction with Geospatial Data. In *Smart Graphics*, Andreas Butz, Brian Fisher, Marc Christie, Antonio Krger, Patrick Olivier, and Roberto Thern (Eds.). Lecture Notes in Computer Science, Vol. 5531. Springer Berlin Heidelberg, 81–92. DOI : http://dx.doi.org/10.1007/978-3-642-02115-2_7
- Rudolph P Darken, William R Cockayne, and David Carmein. 1997. The omni-directional treadmill: a locomotion device for virtual worlds. In *Proceedings of the 10th annual ACM symposium on User interface software and technology*. ACM, 213–221.
- Edward J.C. Dawe and James Davis. 2011. (vi) Anatomy and biomechanics of the foot and ankle. *Orthopaedics and Trauma* 25, 4 (2011), 279 – 286.

- David Dearman, Amy Karlson, Brian Meyers, and Ben Bederson. 2010. Multi-modal text entry and selection on a mobile device. In *Proceedings of Graphics Interface 2010*. Canadian Information Processing Society, 19–26.
- Wilfrid Taylor Dempster. 1955. *Space requirements of the seated operator: geometrical, kinematic, and mechanical aspects of the body, with special reference to the limbs*. Technical Report. Wright Patterson Air Force Base. 55–159 pages.
- Giannis Drossis, Dimitris Grammenos, Maria Bouhli, Iliia Adami, and Constantine Stephanidis. 2013. Comparative Evaluation among Diverse Interaction Techniques in Three Dimensional Environments. In *Distributed, Ambient, and Pervasive Interactions*. Springer, 3–12.
- Colin G Drury. 1975. Application of Fitts' Law to foot-pedal design. *Human Factors: The Journal of the Human Factors and Ergonomics Society* 17, 4 (1975), 368–373.
- Douglas Engelbart. 1984. Doug Engelbart Discusses Mouse Alternatives. (May 1984). Retrieved March 3, 2014 from ftp://ftp.cs.utk.edu/pub/shuford/terminal/engelbart_mouse.alternatives.html
- William K English, Douglas C Engelbart, and Melvyn L Berman. 1967. Display-selection techniques for text manipulation. *Human Factors in Electronics, IEEE Transactions on* 1 (1967), 5–15.
- Jeff Feasel, Mary C Whitton, and Jeremy D Wendt. 2008. LLCM-WIP: Low-latency, continuous-motion walking-in-place. In *3D User Interfaces, 2008. 3DUI 2008. IEEE Symposium on*. IEEE, 97–104.
- Mikael Fernström and Niall Griffith. 1998. Litefoot—Auditory Display of Footwork. In *Proceeding of the 5th International Conference on Auditory Display (ICAD)*, Vol. 98.
- Carl Fischer, Poorna Talkad Sukumar, and Mike Hazas. 2013. Tutorial: implementation of a pedestrian tracker using foot-mounted inertial sensors. *IEEE Pervasive Computing* 12, 2 (2013), 17–27.
- Paul M Fitts. 1954. The information capacity of the human motor system in controlling the amplitude of movement. *Journal of experimental psychology* 47, 6 (1954), 381.
- Martin Frey. 2007. CabBoots: shoes with integrated guidance system. In *Proceedings of the 1st international conference on Tangible and embedded interaction*. ACM, 245–246.
- Davronzhon Gafurov, Patrick Bours, and Einar Snekkenes. 2011. User authentication based on foot motion. *Signal, Image and Video Processing* 5, 4 (Aug. 2011), 457–467.
- Fredrick P Garcia and Kim-Phuong L Vu. 2009. Effects of Practice with Foot-and Hand-Operated Secondary Input Devices on Performance of a Word-Processing Task. In *Human Interface and the Management of Information. Designing Information Environments*. Springer, 505–514.
- Fredrick P. Garcia and Kim-Phuong L. Vu. 2011. Effectiveness of hand- and foot-operated secondary input devices for word-processing tasks before and after training. *Computers in Human Behavior* 27, 1 (2011), 285–295.
- Francine Gemperle, Chris Kasabach, John Stivoric, Malcolm Bauer, and Richard Martin. 1998. Design for wearability. In *Wearable Computers, 1998. Digest of Papers. Second International Symposium on*. IEEE, 116–122.
- Raymond W. Gibbs. 2006. *Embodiment and Cognitive Science*. Cambridge University Press, NY.
- Fabian Göbel, Konstantin Klamka, Andreas Siegel, Stefan Vogt, Sophie Stellmach, and Raimund Dachsel. 2013. Gaze-supported foot interaction in zoomable information spaces. In *CHI '13 Extended Abstracts on Human Factors in Computing Systems on - CHI EA '13*. ACM Press, New York, New York, USA, 3059.
- Tammy S Gregersen. 2005. Nonverbal cues: Clues to the detection of foreign language anxiety. *Foreign Language Annals* 38, 3 (2005), 388–400.
- Kaj Grønbaek, Ole S Iversen, Karen Johanne Kortbek, Kaspar Rosengreen Nielsen, and Louise Aagaard. 2007. IGameFloor: a platform for co-located collaborative games. In *Proceedings of the international conference on Advances in computer entertainment technology*. ACM, 64–71.
- Edward Hall. 1966. The hidden dimension. (1966).
- Teng Han, Jason Alexander, Abhijit Karnik, Pourang Irani, and Sriram Subramanian. 2011. Kick: investigating the use of kick gestures for mobile interactions. In *Proceedings of the 13th International Conference on Human Computer Interaction with Mobile Devices and Services*. ACM, ACM Press, New York, New York, USA, 29–32.
- Jinni A Harrigan, Thomas E Oxman, and Robert Rosenthal. 1985. Rapport expressed through nonverbal behavior. *Journal of Nonverbal Behavior* 9, 2 (1985), 95–110.
- Olaf Hauk, Ingrid Johnsrude, and Friedemann Pulvermüller. 2004. Somatotopic representation of action words in human motor and premotor cortex. *Neuron* 41, 2 (2004), 301–307.
- William E Hick. 1952. On the rate of gain of information. *Quarterly Journal of Experimental Psychology* 4, 1 (1952), 11–26.

- Hideaki Higuchi and Takuya Nojima. 2010. Shoe-shaped i/o interface. In *Adjunct proceedings of the 23rd annual ACM symposium on User interface software and technology (UIST '10)*. ACM, New York, NY, USA, 423–424.
- Ken Hinckley, R Jacob, and Colin Ware. 2004. Input/output devices and interaction techniques. (2004).
- Ken Hinckley and Daniel Wigdor. 2002. Input technologies and techniques. *The human-computer interaction handbook: fundamentals, evolving technologies and emerging applications* (2002), 151–168.
- Jason A Hockman, Marcelo M Wanderley, and Ichiro Fujinaga. 2009. Real-time phase vocoder manipulation by runners pace. In *Proc. Int. Conf. on New Interfaces for Musical Expression (NIME)*. 90–93.
- Errol R Hoffmann. 1991. A comparison of hand and foot movement times. *Ergonomics* 34, 4 (1991), 397–406.
- John M Hollerbach. 2002. Locomotion interfaces. In *Handbook of virtual environments: Design, implementation, and applications*, Kelly S. Hale and Kay M. Stanney (Eds.). Lawrence Erlbaum Associates, 239–254.
- Richard Zhi-Ling Hu, Adam Hartfiel, James Tung, Adel Fakh, Jesse Hoey, and Pascal Poupart. 2011. 3D Pose tracking of walker users' lower limb with a structured-light camera on a moving platform. In *Computer Vision and Pattern Recognition Workshops (CVPRW), 2011 IEEE Computer Society Conference on*. IEEE, 29–36.
- Bufu Huang, Meng Chen, Weizhong Ye, and Yangsheng Xu. 2006. Intelligent Shoes for Human Identification. In *Robotics and Biomimetics, 2006. ROBIO '06. IEEE International Conference on*. 601–606.
- Bernd Huber. 2013. Foot position as indicator of spatial interest at public displays. In *CHI '13 Extended Abstracts on Human Factors in Computing Systems on - CHI EA '13*. ACM Press, New York, New York, USA, 2695.
- Scott E Hudson, Chris Harrison, Beverly L Harrison, and Anthony LaMarca. 2010. Whack gestures: inexact and inattentive interaction with mobile devices. In *Proceedings of the fourth international conference on Tangible, embedded, and embodied interaction*. ACM, 109–112.
- Ray Hyman. 1953. Stimulus information as a determinant of reaction time. *Journal of experimental psychology* 45, 3 (1953), 188.
- Hiroo Iwata, Hiroaki Yano, and Fumitaka Nakaizumi. 2001. Gait master: A versatile locomotion interface for uneven virtual terrain. In *Virtual Reality, 2001. Proceedings. IEEE*. IEEE, 131–137.
- Shahram Jalaliniya, Jeremiah Smith, Miguel Sousa, Lars Bütthe, and Thomas Pederson. 2013. Touch-less interaction with medical images using hand & foot gestures. In *Proceedings of the 2013 ACM conference on Pervasive and ubiquitous computing adjunct publication - UbiComp '13 Adjunct*. ACM Press, New York, New York, USA, 1265.
- Frédéric Jean and Alexandra Branzan Albu. 2008. The visual keyboard: Real-time feet tracking for the control of musical meta-instruments. *Signal Processing: Image Communication* 23, 7 (Aug. 2008), 505–515.
- Ricardo Jota, Pedro Lopes, Daniel Wigdor, and Joaquim A Jorge. 2014. Let's Kick It : How to Stop Wasting the Bottom Third of Your Large - Scale Display. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. 1411–1414.
- Gregory Juckett. 2005. Cross-cultural medicine. *American Family Physician* 72, 11 (2005), 2267–2274.
- Maria Karam and m.c. schraefel. 2005. *A taxonomy of gestures in human computer interactions*. Technical Report.
- Sang-Hwan Kim and David B. Kaber. 2009. Design and evaluation of dynamic text-editing methods using foot pedals. *International Journal of Industrial Ergonomics* 39, 2 (March 2009), 358–365.
- Kyoungchul Kong and Masayoshi Tomizuka. 2009. A Gait Monitoring System Based on Air Pressure Sensors Embedded in a Shoe. *Mechatronics, IEEE/ASME Transactions on* 14, 3 (June 2009), 358–370.
- Karl H E Kroemer. 1971. Foot operation of controls. *Ergonomics* 14, 3 (1971), 333–361.
- Peter Krogh, Martin Ludvigsen, and Andreas Lykke-Olesen. 2007. "Help Me Pull That Cursor" A Collaborative Interactive Floor Enhancing Community Interaction. *Australasian Journal of Information Systems* 11, 2 (2007), 75–87.
- Yuichiro Kume, Akihiko Shirai, and Masaru Sato. 1998. Foot Interface : Fantastic Phantom Slipper. In *ACM SIGGRAPH 98 Conference abstracts and applications (SIGGRAPH '98)*. ACM, New York, NY, USA, 114—.
- Joseph J LaViola Jr, Daniel Acevedo Feliz, Daniel F Keefe, Robert C Zeleznik, and JJ LaViola Jr. 2001. Hands-free multi-scale navigation in virtual environments. In *Proceedings of the 2001 symposium on Interactive 3D graphics*. ACM, 9–15.
- Anatole Lécuyer, Maud Marchal, Adrien Hamelin, David Wolinski, Federico Fontana, Marco Civolani, Stefano Papetti, Stefania Serafin, and Others. 2011. Shoes-your-style: changing sound of footsteps to cre-

- ate new walking experiences. In *Proceedings of workshop on sound and music computing for human-computer interaction (CHIItaly)*, Alghero, Italy. 13–16.
- Lynn S Lippert. 2011. *Clinical kinesiology and anatomy*. FA Davis.
- Pedro André Santos Afonso Lopes, Guilherme Fernandes, and Joaquim Jorge. 2010. Trainable DTW-based classifier for recognizing feet-gestures. In *16th Portuguese Conference on Pattern Recognition (RecPad 2010)*.
- C Owen Lovejoy. 1988. Evolution of human walking. *Sci Am* 259, 5 (1988), 118–25.
- I Scott MacKenzie. 1992. Fitts' law as a research and design tool in human-computer interaction. *Human-computer interaction* 7, 1 (1992), 91–139.
- Steve Mann. 1997. Smart clothing: The wearable computer and wearcam. *Personal Technologies* 1, 1 (1997), 21–27.
- Denys J. C. Matthies, Franz Müller, Christoph Anthes, and Dieter Kranzlmüller. 2013. ShoeSoleSense: proof of concept for a wearable foot interface for virtual and real environments. In *Proceedings of the 19th ACM Symposium on Virtual Reality Software and Technology - VRST '13*. ACM Press, New York, New York, USA, 93.
- Lisa McElligott, Michelle Dillon, Krispin Leydon, Bruce Richardson, Mikael Fernström, and Joseph A Paradiso. 2002. ForSe FIELDS-Force Sensors for Interactive Environments. In *UbiComp 2002: Ubiquitous Computing*. Springer, 168–175.
- Daniel C McFarlane and Steven M Wilder. 2009. Interactive dirt: increasing mobile work performance with a wearable projector-camera system. In *Proceedings of the 11th international conference on Ubiquitous computing*. ACM, 205–214.
- Albert Mehrabian. 1968. Some referents and measures of nonverbal behavior. *Behavior Research Methods & Instrumentation* 1, 6 (1968), 203–207.
- Bart Moens, Leon van Noorden, and Marc Leman. 2010. D-Jogger: Syncing music with walking. (2010).
- Farhan Mohamed and Sidney Fels. 2002. LMNKui: Overlaying computer controls on a piano keyboard. In *CHI '02 extended abstracts on Human factors in computing systems - CHI '02*, Vol. 100. ACM Press, New York, New York, USA, 140.
- Robert E Morley Jr, Edward J Richter, Joseph W Klaesner, Katrina S Maluf, Michael J Mueller, and R E Morley. 2001. In-shoe multisensory data acquisition system. *Biomedical Engineering, IEEE Transactions on* 48, 7 (July 2001), 815–820.
- Desmond Morris. 2002. *Peopewatching*. Random House.
- Joe Navarro and Marvin Karlins. 2009. *What every body is saying*. HarperCollins.
- Devin Odom, Krishana Wooding, and Jesse Longoria. 2006. Thigh-Controlled Piano Pedal. *NSF 2006 Engineering Senior Design Projects to Aid Persons with Disabilities* (2006).
- Giulia Orecchini, Li Yang, M Tentzeris, and Luca Roselli. 2011. Smart Shoe: An autonomous inkjet-printed RFID system scavenging walking energy. In *Antennas and Propagation (APSURSI), 2011 IEEE International Symposium on*. IEEE, 1417–1420.
- Robert J Orr and Gregory D Abowd. 2000. The smart floor: a mechanism for natural user identification and tracking. In *CHI'00 extended abstracts on Human factors in computing systems*. ACM, 275–276.
- Volker Paelke, Christian Reimann, and Dirk Stichling. 2004. Foot-based mobile interaction with games. In *Proceedings of the 2004 ACM SIGCHI International Conference on Advances in computer entertainment technology*. ACM, 321–324.
- Toni Pakkanen and Roope Raisamo. 2004. Appropriateness of foot interaction for non-accurate spatial tasks. In *CHI '04 Extended Abstracts on Human Factors in Computing Systems (CHI EA '04)*. ACM, New York, NY, USA, 1123–1126.
- Stefano Papetti, Marco Civolani, and Federico Fontana. 2011. Rhythm n Shoes : a wearable foot tapping interface with audio-tactile feedback. In *Proceedings of international conference of new interfaces for musical expression*. 473–476.
- Joseph Paradiso, Craig Abler, Kai-yuh Hsiao, and Matthew Reynolds. 1997. The magic carpet: physical sensing for immersive environments. In *CHI'97 Extended Abstracts on Human Factors in Computing Systems*. ACM, 277–278.
- Joseph A Paradiso, Kai-yuh Hsiao, Ari Y Benbasat, and Zoe Teegarden. 2000. Design and implementation of expressive footwear. *IBM Systems Journal* 39, 3.4 (2000), 511–529.
- Joseph A Paradiso, Kai-Yuh Hsiao, and Eric Hu. 1999. Interactive music for instrumented dancing shoes. In *Proc. of the 1999 International Computer Music Conference*. Citeseer, 453–456.
- Joseph A Paradiso and Eric Hu. 1997. Expressive footwear for computer-augmented dance performance. In *Wearable Computers, 1997. Digest of Papers., First International Symposium on*. IEEE, 165–166.

- Joseph A Paradiso, Eric Hu, and Kai-yuh Hsiao. 1998. Instrumented footwear for interactive dance. In *Proc. of the XII Colloquium on Musical Informatics*. 24–26.
- Joseph A Paradiso, Eric Hu, and Kai-yuh Y Hsiao. 1999. The CyberShoe: a wireless multisensor interface for a dancer's feet. *Proceedings of International Dance and Technology 99* (1999), 57–60.
- Joseph A Paradiso, Stacy J Morris, Ari Y Benbasat, and Erik Asmussen. 2004. Interactive therapy with instrumented footwear. In *CHI'04 Extended Abstracts on Human Factors in Computing Systems*. ACM, 1341–1343.
- Glenn Pearson and Mark Weiser. 1986. Of moles and men: the design of foot controls for workstations. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '86)*. ACM, New York, NY, USA, 333–339.
- Glenn Pearson and Mark Weiser. 1988a. Exploratory evaluation of a planar foot-operated cursor-positioning device. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '88)*. ACM, New York, NY, USA, 13–18.
- Glenn Pearson and Mark Weiser. 1988b. Exploratory Evaluations of two Versions of a Foot-Operated Cursor-Positioning Device in a Target-Selection Task. *ACM SIGCHI Bulletin* 19, 3 (1988), 70–75.
- Francis Quek, Roger Ehrich, and Thurmon Lockhart. 2008. As go the feet...: on the estimation of attentional focus from stance. In *Proceedings of the 10th international conference on Multimodal interfaces*. ACM, 97–104.
- Francis Quek, David McNeill, Robert Bryll, Susan Duncan, Xin-Feng Ma, Cemil Kirbas, Karl E McCullough, and Rashid Ansari. 2002. Multimodal human discourse: gesture and speech. *ACM Transactions on Computer-Human Interaction (TOCHI)* 9, 3 (2002), 171–193.
- Bruce Richardson, Krispin Leydon, Mikael Fernstrom, and Joseph A Paradiso. 2004. Z-Tiles: building blocks for modular, pressure-sensing floorspaces. In *CHI'04 extended abstracts on Human factors in computing systems*. ACM, 1529–1532.
- Stephan Richter, Christian Holz, and Patrick Baudisch. 2012. Bootstrapper: recognizing tabletop users by their shoes. In *Proceedings of the 2012 ACM annual conference on Human Factors in Computing Systems*. ACM, ACM Press, New York, New York, USA, 1249–1252.
- Asbjørn Roaas and Gunnar BJ Andersson. 1982. Normal range of motion of the hip, knee and ankle joints in male subjects, 30-40 years of age. *Acta Orthopaedica* 53, 2 (1982), 205–208.
- Sandra P Rosenblum. 1993. Pedaling the piano: A brief survey from the eighteenth century to the present. *Performance Practice Review* 6, 2 (1993), 8.
- A F Rovers and H A Van Essen. 2005. FootIO - design and evaluation of a device to enable foot interaction over a computer network. In *Eurohaptics Conference, 2005 and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems, 2005. World Haptics 2005. First Joint*. 521–522.
- A F Rovers and H A Van Essen. 2006. Guidelines for haptic interpersonal communication applications: an exploration of foot interaction styles. *Virtual Reality* 9, 2-3 (Dec. 2006), 177–191.
- Dan Saffer. 2008. *Designing gestural interfaces: Touchscreens and interactive devices*. "O'Reilly Media, Inc."
- Nuttapol Sangsuriyachot, Haipeng Mi, and Masanori Sugimoto. 2011. Novel interaction techniques by combining hand and foot gestures on tabletop environments. In *Proceedings of the ACM International Conference on Interactive Tabletops and Surfaces - ITS '11*. ACM Press, New York, New York, USA, 268–269.
- William Saunders and Daniel Vogel. 2015. The Performance of Indirect Foot Pointing using Discrete Taps and Kicks While Standing. In *Proceedings of Graphics Interface*, Vol. 2015.
- Albrecht Schmidt. 2000. Implicit human computer interaction through context. *Personal Technologies* 4, 2-3 (2000), 191–199.
- Dominik Schmidt, Raf Ramakers, Esben Pedersen, Johannes Jasper, Sven Köhler, Aileen Pohl, Hannes Rantzs, Andreas Rau, Patrick Schmidt, Christoph Sterz, Yanina Yurchenko, and Patrick Baudisch. 2014. Kickables: Tangibles for Feet. In *CHI'14*.
- Johannes Schöning, Florian Daiber, Antonio Krüger, and Michael Rohs. 2009. Using hands and feet to navigate and manipulate spatial data. In *CHI '09 Extended Abstracts on Human Factors in Computing Systems (CHI EA '09)*. ACM, New York, NY, USA, 4663–4668.
- Claudia Scorolli and Anna M Borghi. 2007. Sentence comprehension and action: Effector specific modulation of the motor system. *Brain research* 1130 (2007), 119–124.
- Jeremy Scott, David Dearman, Koji Yatani, and Khai N Truong. 2010. Sensing foot gestures from the pocket. In *Proceedings of the 23rd annual ACM symposium on User interface software and technology (UIST '10)*. ACM, New York, NY, USA, 199–208.
- Abigail J Sellen, Gordon P Kurtenbach, and William A S Buxton. 1992. The prevention of mode errors through sensory feedback. *Human-Computer Interaction* 7, 2 (1992), 141–164.

- Sameen Shaukat, Muhammad Haroon Yousaf, and Hafiz Adnan Habib. 2010. Real-time feet movement detection and tracking for controlling a Toy car. In *Advanced Computer Theory and Engineering (ICACTE), 2010 3rd International Conference on*, Vol. 6. IEEE, V6—5.
- Adalberto Simeone, Eduardo Velloso, Jason Alexander, and Hans Gellersen. 2014. Feet Movement in Desk-top 3D Interaction. In *Proceedings of the 2014 IEEE Symposium on 3D User Interfaces*. IEEE.
- Riitta L. Simonen, Tapio Videman, Michele C. Battié, and Laura E. Gibbons. 1995. Comparison of foot and hand reaction times among men: A methodologic study using simple and multiple-choice repeated measurements. *Perceptual and Motor Skills* (1995).
- Mel Slater, Martin Usoh, and Anthony Steed. 1995. Taking steps: the influence of a walking technique on presence in virtual reality. *ACM Transactions on Computer-Human Interaction (TOCHI)* 2, 3 (1995), 201–219.
- Johannes Springer and Christa Siebes. 1996. Position controlled input device for handicapped: Experimental studies with a footmouse. *International Journal of Industrial Ergonomics* 17, 2 (1996), 135–152.
- Frank Steinicke, Yon Visell, Jennifer Campos, and Anatole Lécuyer. 2013. Human Walking in Virtual Environments. (2013).
- Jelle Stienstra, Kees Overbeeke, and Stephan Wensveen. 2011. Embodying complexity through movement sonification: case study on empowering the speed-skater. In *Proceedings of the 9th ACM SIGCHI Italian Chapter International Conference on Computer-Human Interaction: Facing Complexity*. ACM, 39–44.
- Jonathan Sykes and Simon Brown. 2003. Affective gaming: measuring emotion through the gamepad. In *CHI03 extended abstracts on Human factors in computing systems*. ACM, 732–733.
- Yanbo Tao, Tin Lun Lam, Huihuan Qian, and Yangsheng Xu. 2012. A real-time intelligent shoe-keyboard for computer input. In *2012 IEEE International Conference on Robotics and Biomimetics (ROBIO)*. IEEE, 1488–1493.
- James N Templeman, Patricia S Denbrook, and Linda E Sibert. 1999. Virtual locomotion: Walking in place through virtual environments. *Presence* 8, 6 (1999), 598–617.
- Edward O Thorp. 1998. The invention of the first wearable computer. *Second International Symposium on Wearable Computers* (1998), 4—8.
- Cuong Tran, Anup Doshi, and Mohan Manubhai Trivedi. 2012. Modeling and prediction of driver behavior by foot gesture analysis. *Computer Vision and Image Understanding* 116, 3 (2012), 435–445.
- Donald J Trombley. 1966. *Experimental Determination of an Optimal Foot Pedal Design*. Technical Report. Central Library Texas, Technological College, Lubbock (TX).
- Shafiq ur Réhman, Abdullah Khan, Haibo Li, and Applied Physics. 2012. Interactive Feet for Mobile Immersive Interaction. In *MobileHCI 2012 : Mobile Vision (MobiVis) Vision-based Applications and HCI*, Vol. 2011. MOBIVIS.
- Eduardo Velloso, Jason Alexander, Andreas Bulling, and Hans Gellersen. 2015a. Interactions under the Desk: A Characterisation of Foot Movements for Input in a Seated Position. In *Proceedings of the 15th IFIP International Conference (INTERACT)*.
- Eduardo Velloso, Carl Oechsner, Katharina Sachmann, Markus Wirth, and Hans Gellersen. 2015b. Arcade+: A Platform for Public Deployment and Evaluation of Multi-Modal Games. In *Proceedings of the second ACM SIGCHI annual symposium on Computer-human interaction in play*. ACM.
- Julie Wagner, Mathieu Nancel, Sean G. Gustafson, Stephane Huot, and Wendy E. Mackay. 2013. Body-centric design space for multi-surface interaction. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems - CHI '13*. ACM Press, New York, New York, USA, 1299.
- Junji Watanabe, Hideyuki Ando, and Taro Maeda. 2005. Shoe-shaped interface for inducing a walking cycle. In *Proceedings of the 2005 international conference on Augmented tele-existence*. ACM, 30–34.
- Timothy D Weaver and RG Klein. 2006. The evolution of human walking. (2006).
- Jeremy D Wendt, Mary C Whitton, and Frederick P Brooks Jr. 2010. Gud wip: Gait-understanding-driven walking-in-place. In *Virtual Reality Conference (VR), 2010 IEEE*. IEEE, 51–58.
- Betsy Williams, Stephen Bailey, Gayathri Narasimham, Muqun Li, and Bobby Bodenheimer. 2011. Evaluation of walking in place on a wii balance board to explore a virtual environment. *ACM Transactions on Applied Perception (TAP)* 8, 3 (2011), 19.
- Erivaldo Xavier, De Lima Filho, Mateus Bisotto Nunes, Luciana Nedel, Porto Alegre, Erivaldo Xavier de Lima Filho, and Joao Comba. 2011. Why Not with the Foot?. In *2011 Brazilian Symposium on Games and Digital Entertainment*. IEEE, 270–281.
- T. Yamamoto, M. Tsukamoto, and T. Yoshihisa. 2008. Foot-Step Input Method for Operating Information Devices While Jogging. In *Applications and the Internet, 2008. SAINT 2008. International Symposium on*. 173–176.

- Takashi Yamauchi. 2013. Mouse Trajectories and State Anxiety: Feature Selection with Random Forest. In *Affective Computing and Intelligent Interaction (ACII), 2013 Humaine Association Conference on*. IEEE, 399–404.
- Weizhong Ye, Yangsheng Xu, and Ka Keung Lee. 2005. Shoe-Mouse: An integrated intelligent shoe. In *Intelligent Robots and Systems, 2005.(IROS 2005). 2005 IEEE/RSJ International Conference on*. IEEE, 1163–1167.
- Muhammad Haroon Yousaf and Hafiz Adnan Habib. 2012. Adjustable Pedals by Gesture Recognition: A Novel Approach for User Interface in Automotive. *Middle-East Journal of Scientific Research* 11, 11 (2012), 1575–1583.
- Ye Zheng, Matthew McCaleb, Courtney Strachan, and Betsy Williams. 2012. Exploring a virtual environment by walking in place using the Microsoft Kinect. In *Proceedings of the ACM symposium on applied perception*. ACM, 131–131.
- Kang Zhong, Feng Tian, and Hongan Wang. 2011. Foot Menu: Using Heel Rotation Information for Menu Selection. In *2011 15th Annual International Symposium on Wearable Computers*. Ieee, 115–116.

Received November 2014; revised June 2015; accepted July 2015